Already Cut Houses

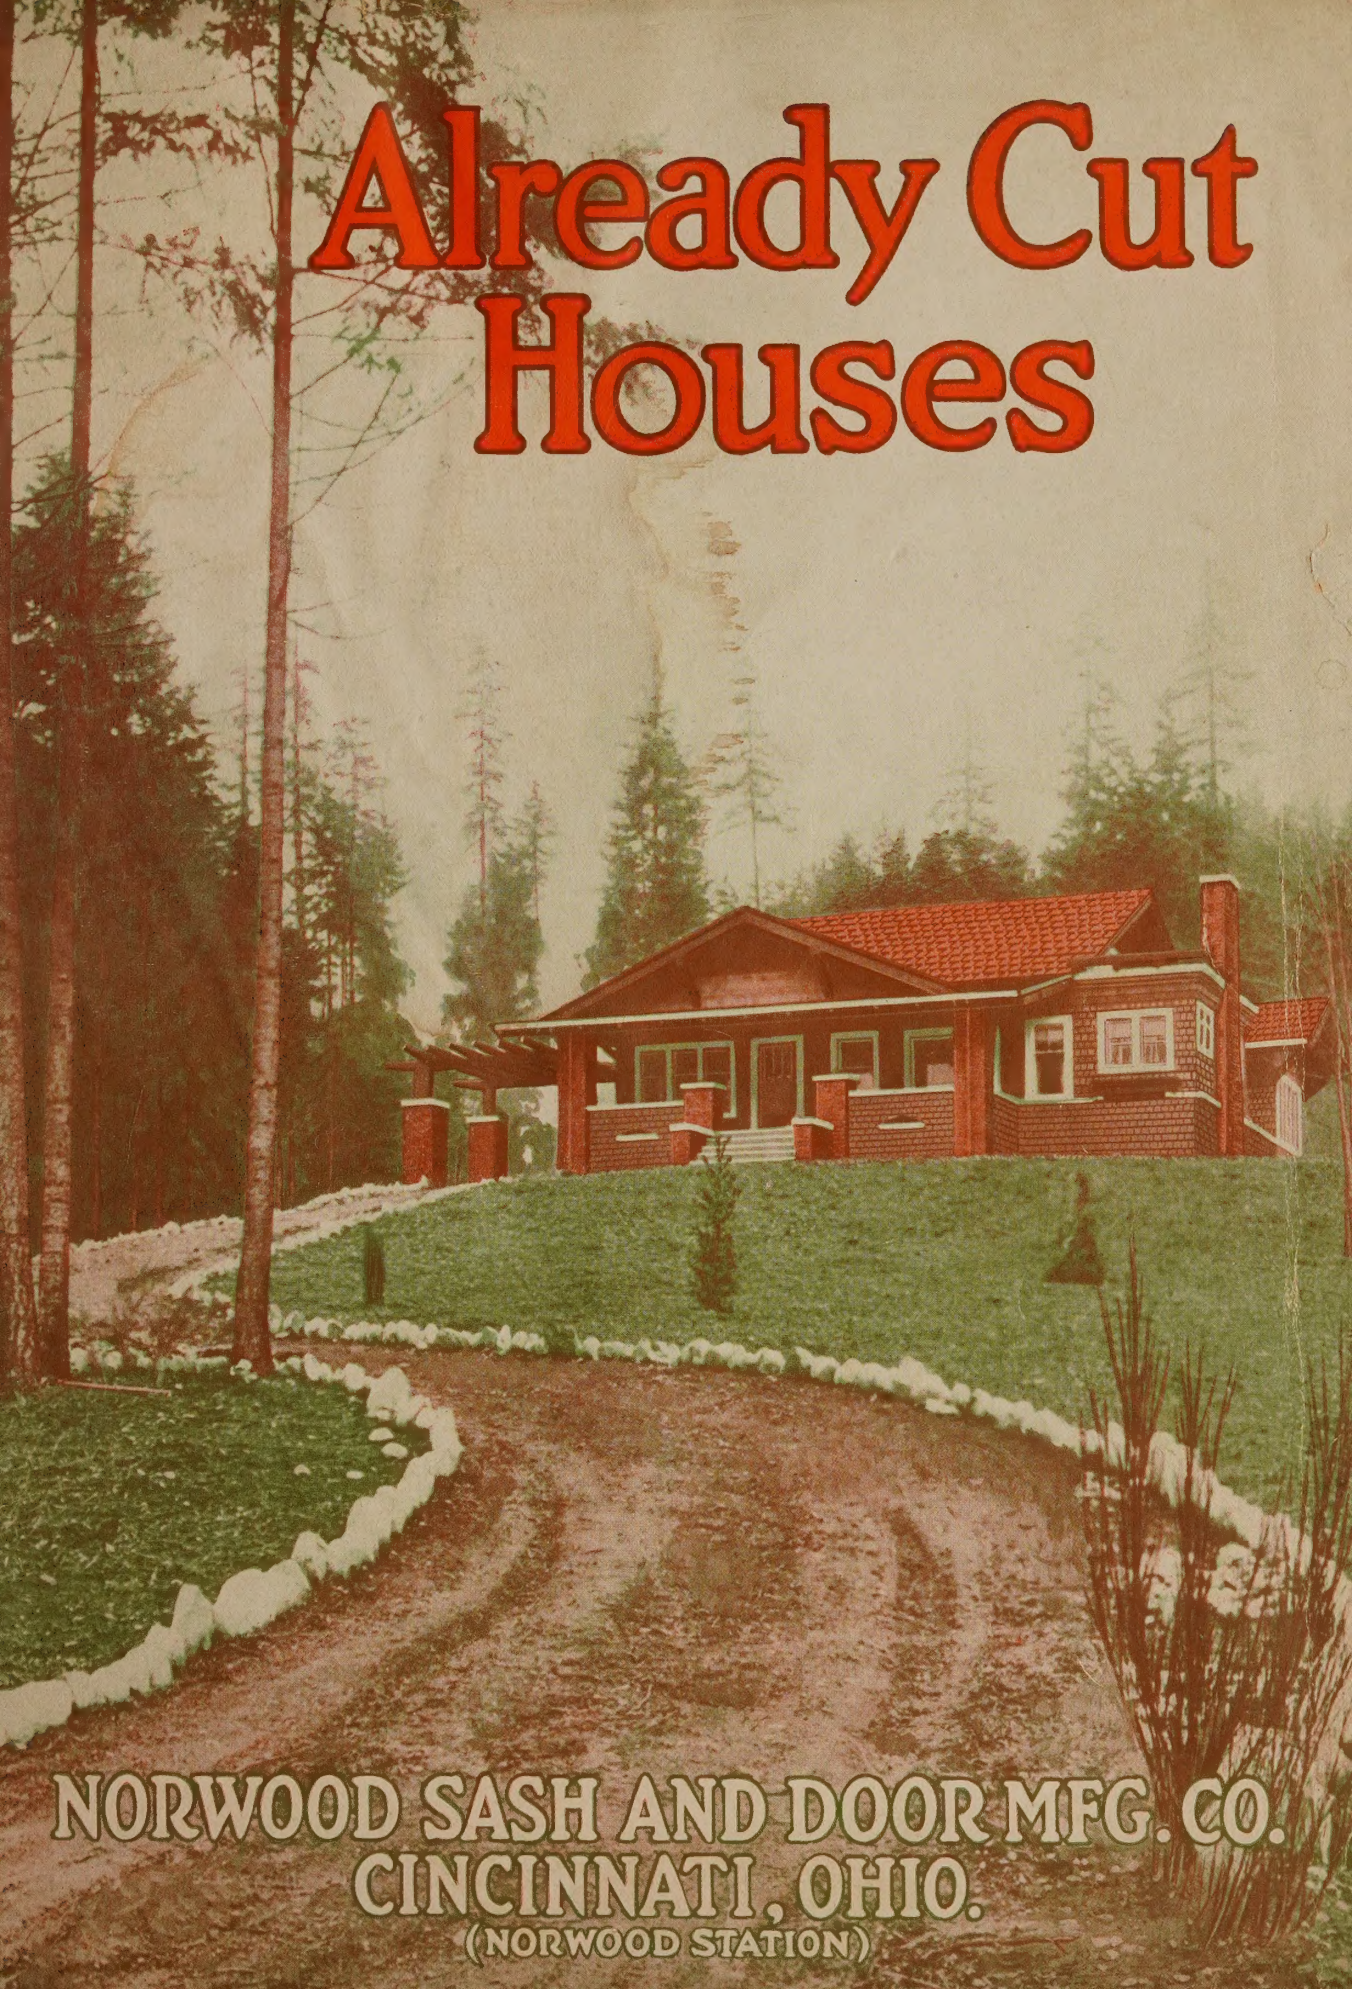

NORWOOD SASH AND DOOR MFG. CO.
CINCINNATI, OHIO.
(NORWOOD STATION)

Our "Already Cut" Houses Are Double Built

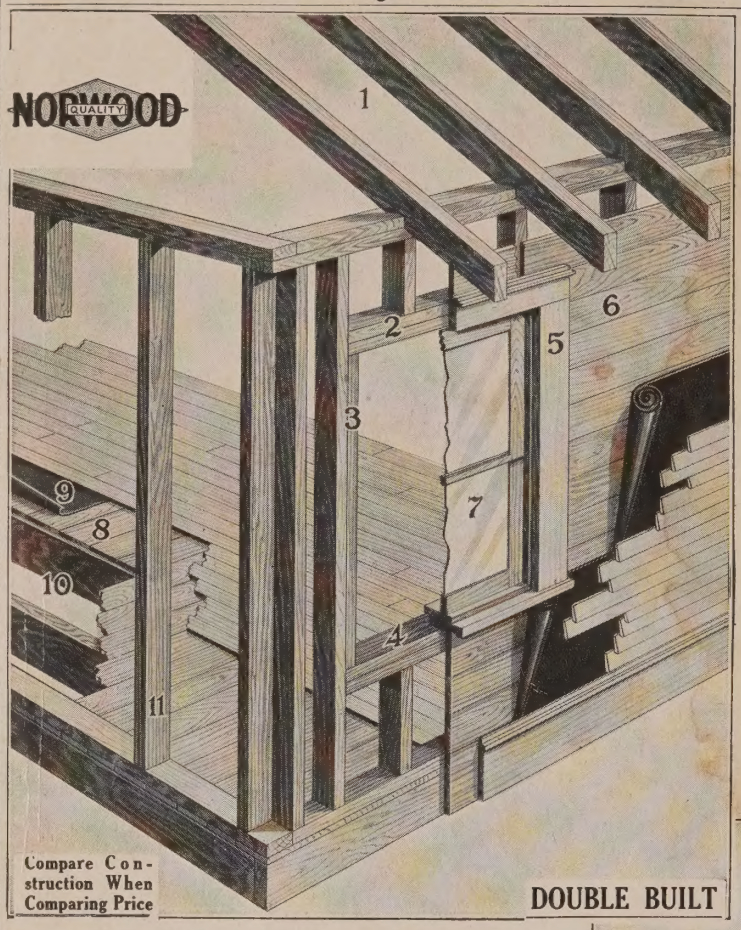

Compare Construction When Comparing Price

DOUBLE BUILT

Double Built

Eleven Reasons Why You Should Buy It:

1. Rafters, 14⅜ INCHES APART.
2. DOUBLE PLATES over doors and windows.
3. DOUBLE STUDDINGS at sides of doors and windows.
4. DOUBLE PLATES below windows.
5. Outside casing, 1⅛ INCHES THICK.
6. High grade WOOD SHEATHING.
7. All glass 24x28 inches and larger is HIGH QUALITY DOUBLE STRENGTH.

8–9. DOUBLE FLOORS WITH HEAVY BUILDING PAPER between the subfloor and finished floor.

10. Extra heavy joists, 14⅜ INCHES APART.
11. Studdings, 14⅜ INCHES APART.

AVERY LIBRARY
COLUMBIA UNIVERSITY

Ordinary Construction

1. Rafters, 34⅜ INCHES APART.
2. SINGLE PLATES over doors and windows.
3. SINGLE STUDDINGS at sides of doors and windows.
4. SINGLE PLATES below all windows.
5. Outside casing, ⅞ INCH THICK.
6. NO wood sheathing.
7. All glass SINGLE STRENGTH.

8–9. NO SUBFLOOR and NO BUILDING PAPER under floors.

10. Floor joists, 2x6 inches, are placed 22⅜ INCHES APART.
11. Studdings, 23⅜ INCHES APART.

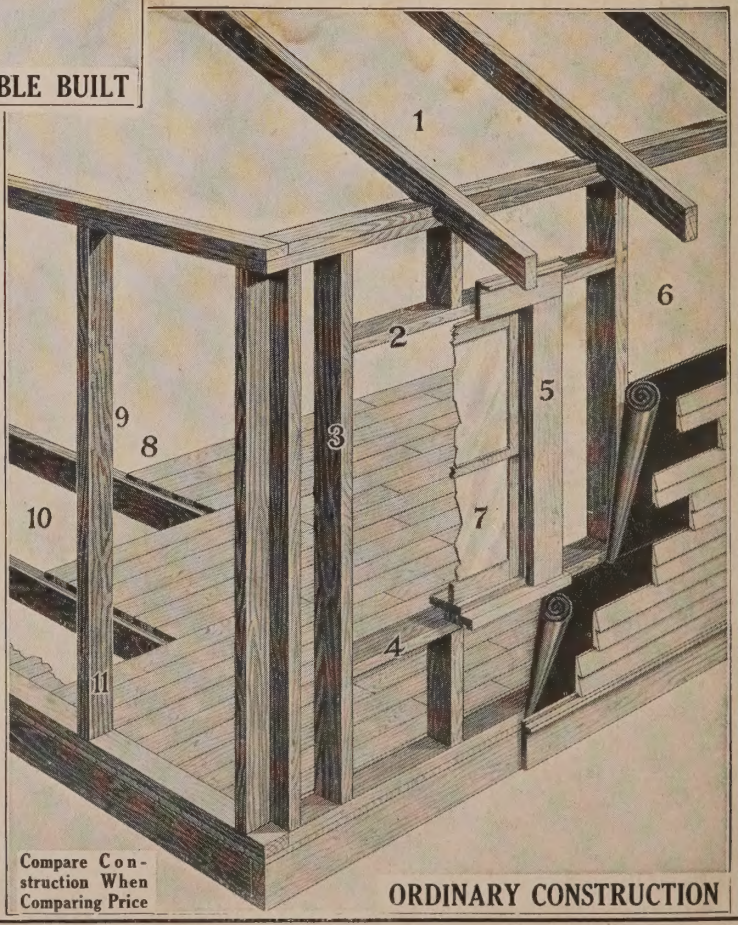

Compare Construction When Comparing Price

ORDINARY CONSTRUCTION

The Norwood Sash and Door Mfg. Co.,
Cincinnati, Ohio
(Norwood Station)

IMPORTANT NOTICE

All contractors and builders are familiar with the fact that the prices on lumber, mill work, hardware, painting materials, glass, etc., have advanced from 25 to 50 per cent during the past few months. Just as this book came from the press another advance has been announced. We have practically kept our prices down to last year's level, but this latest advance compels us to add 10 per cent to the cost of the materials for each house shown in this book. This represents no additional profit whatever to us, and we feel sure that our friends, the contractors, will appreciate our position.

Please advise your customers that the correct prices on all houses in our complete line are as follows:

Name	Page	Price
Ark	20	$ 908.00
Beauty	37	1,510.00
Beech	16	865.00
Bluebird	22	1,096.00
Boston	31	1,258.00
Boulevard	35	1,408.00
Chicago	30	1,170.00
Cozy Corner	11	632.00
Daisy	2	358.00
Dovecote	3	467.00
Elms	18	986.00
Empress	26	1,170.00
Favorite	32	1,250.00
Forget-Me-Not	9	524.00
Haven	39	1,790.00
Hickory	13	874.00
Ingleside	36	1,449.00
Ivy	5	504.00
Jenny Lind	12	631.00
Los Angeles	41	1,997.00
Majestic	38	1,636.00
Mayflower	21	1,016.00
Merrimac	25	1,394.00
Mistletoe	8	513.00
Monitor	24	1,201.00
Morning Glory	7	540.00
Oriole	28	947.00
Palace	42	2,453.00
Parkside	34	1,197.00
Princess	29	1,212.00
Royal Oak	19	926.00
Seattle	40	1,764.00
Storm King	10	563.00
Suburbs	33	1,249.00
Sunburst	6	533.00
Uncle Sam	14	760.00
Union	43	2,074.00
Valentine	4	556.00

Norwood Sash and Door Mfg. Co.

Cincinnati, Ohio

(Norwood Station)

AVERY LIBRARY
COLUMBIA UNIVERSITY

1900

Read These Facts About Lumber

1917

They Explain Why You Should BUILD NOW

Mr. Stockman: In 1900 1,200 pounds of beef would purchase 5,850 feet of Yellow Pine Lumber. On January 1, 1917, the same quantity of beef would purchase 8,000 feet of Yellow Pine Lumber—**2,150 feet more.**

Mr. Poultryman: In 1900 100 dozen eggs would purchase 1,775 feet of Yellow Pine Lumber. On January 1, 1917, the same quantity of eggs would purchase 2,300 feet of Yellow Pine Lumber—**525 feet more.**

Mr. Wheat Grower: In 1900 100 bushels of wheat would purchase 7,000 feet of Yellow Pine Lumber. On January 1, 1917, the same quantity of wheat would purchase 9,650 feet of Yellow Pine Lumber—**2,650 feet more.**

Mr. Corn Grower: In 1900 100 bushels of corn would purchase 4,275 feet of Yellow Pine Lumber. On January 1, 1917, the same quantity of corn would purchase 6,000 feet of Yellow Pine Lumber—**1,725 feet more.**

Mr. Wheat Merchant: In 1900 100 barrels of flour would purchase 31,100 feet of Yellow Pine Lumber. On January 1, 1917, the same quantity of flour would purchase 43,625 feet of Yellow Pine Lumber—**12,525 feet more.**

Mr. Potato Grower: In 1900 100 bushels of potatoes would purchase 13,325 feet of Yellow Pine Lumber. On January 1, 1917, the same quantity of potatoes would purchase 22,900 feet of Yellow Pine Lumber—**9,575 feet more.**

Mr. Building Material Man: In 1900 100 bushels of lime would purchase 5,775 feet of Yellow Pine Lumber. On January 1, 1917, the same quantity of lime would purchase 9,150 feet of Yellow Pine Lumber—**3,375 feet more.**

Isn't it reasonable to suppose that in a short time lumber of all kinds must advance in proportion to the cost of other materials? If you are thinking of building and want to save money on the project

NOW IS THE TIME TO BUY YOUR LUMBER.

Norwood Sash and Door Mfg. Co. Cincinnati, O.

(Norwood Station)

AVERY LIBRARY
COLUMBIA UNIVERSITY

How Our Houses Are Cut and Fitted

These illustrations show, better than words can tell, exactly how we make it easy for you to build your own home. Here is the most difficult part of the entire undertaking reduced to such a simple proposition that you only need a hammer and nails to put up the framework of your house.

Every piece of lumber shown in these illustrations is numbered, so that it can be taken from the bundle without losing time in sorting. Every number corresponds with the number shown on the plans which we furnish.

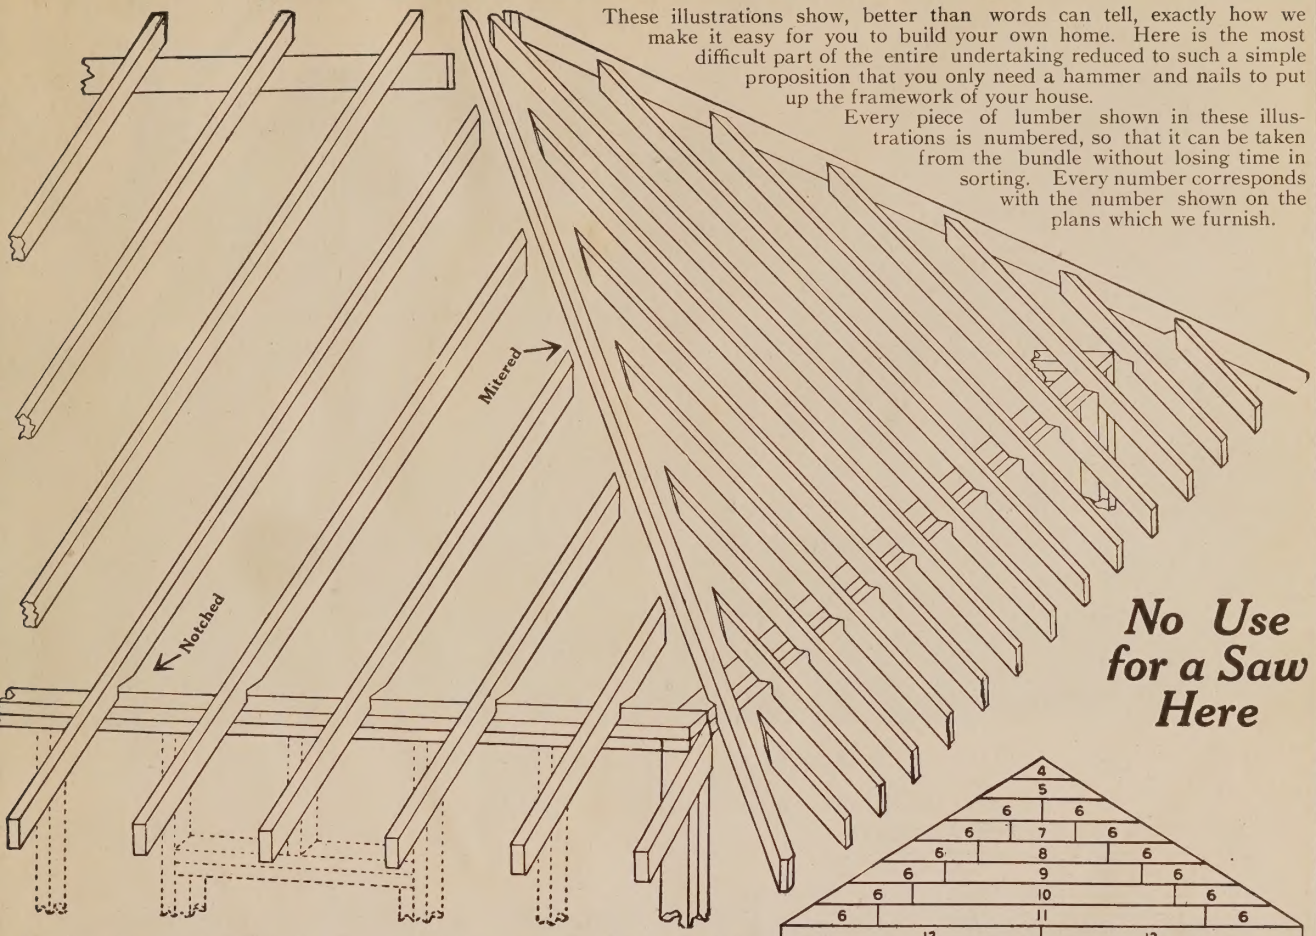

No Use for a Saw Here

Examine this page carefully. Note every illustration. See for yourself how every piece of material is shipped to you ready to go into place.

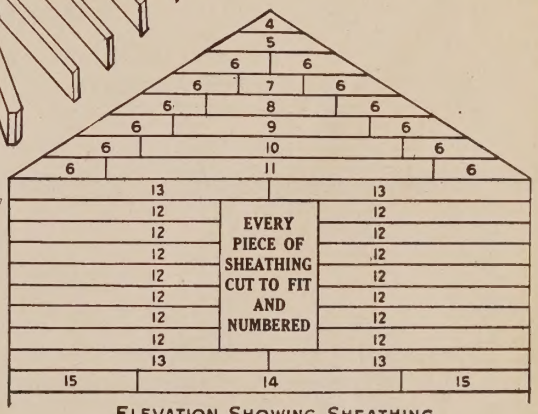

ELEVATION SHOWING SHEATHING

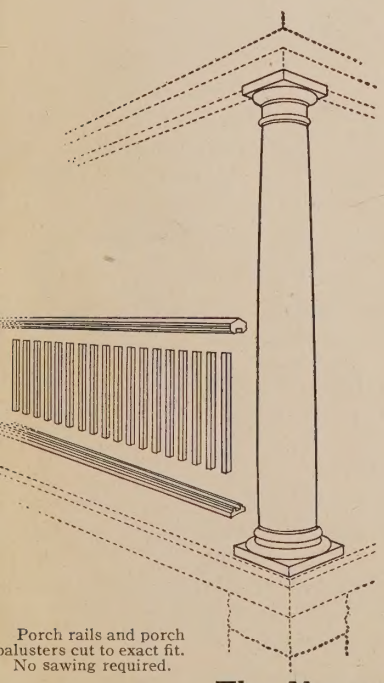

Porch rails and porch balusters cut to exact fit. No sawing required.

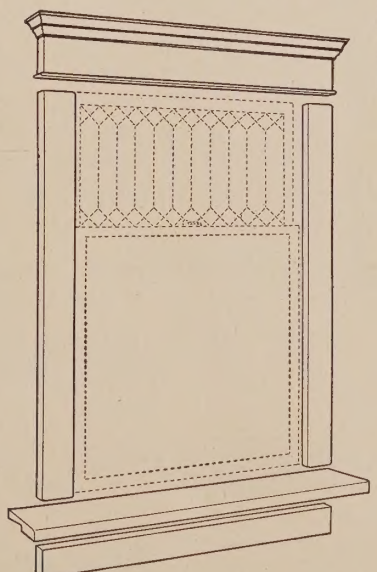

All sets of window and door trim are cut to exact size. No sawing required. Head trim already nailed together.

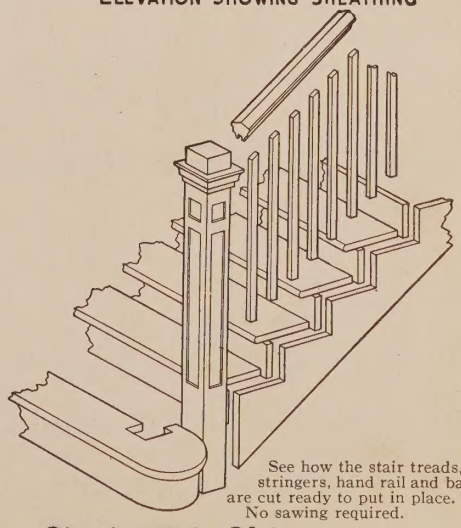

See how the stair treads, risers, stringers, hand rail and balusters are cut ready to put in place. No sawing required.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$326.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

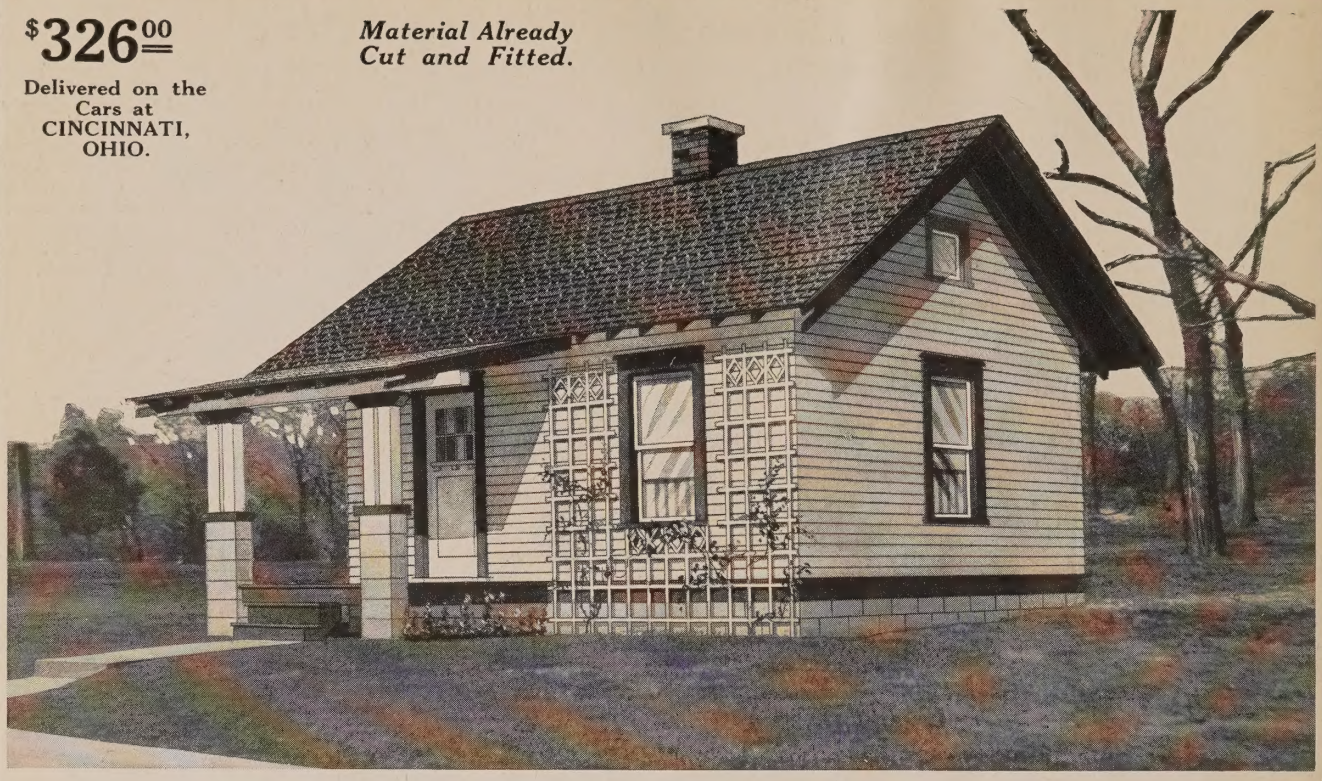

THE DAISY. THREE ROOMS

Complete Plans Furnished Free With Each Order.

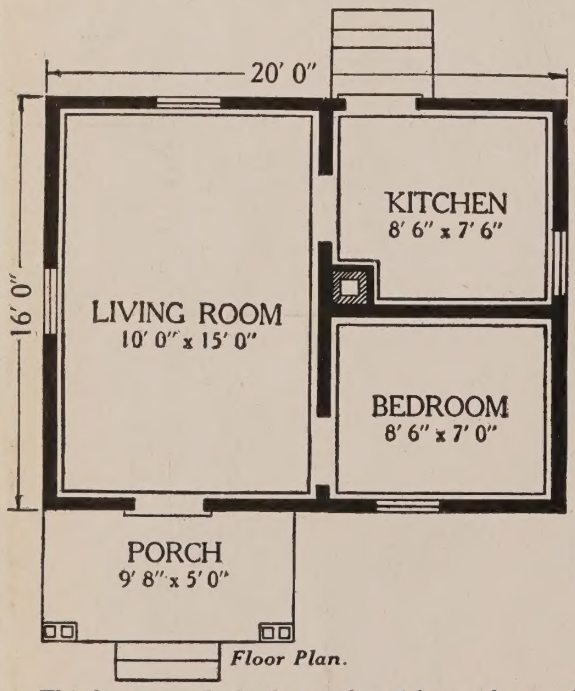

Floor Plan.

This house can be built on a lot 25 feet wide.

For $326.00 we will furnish all the material to build this Three-Room Double Built House, consisting of

LUMBER, LATH,
NORWOOD SHINGLE
ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING, SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick, plaster or trellis.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $25.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $7.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$425.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

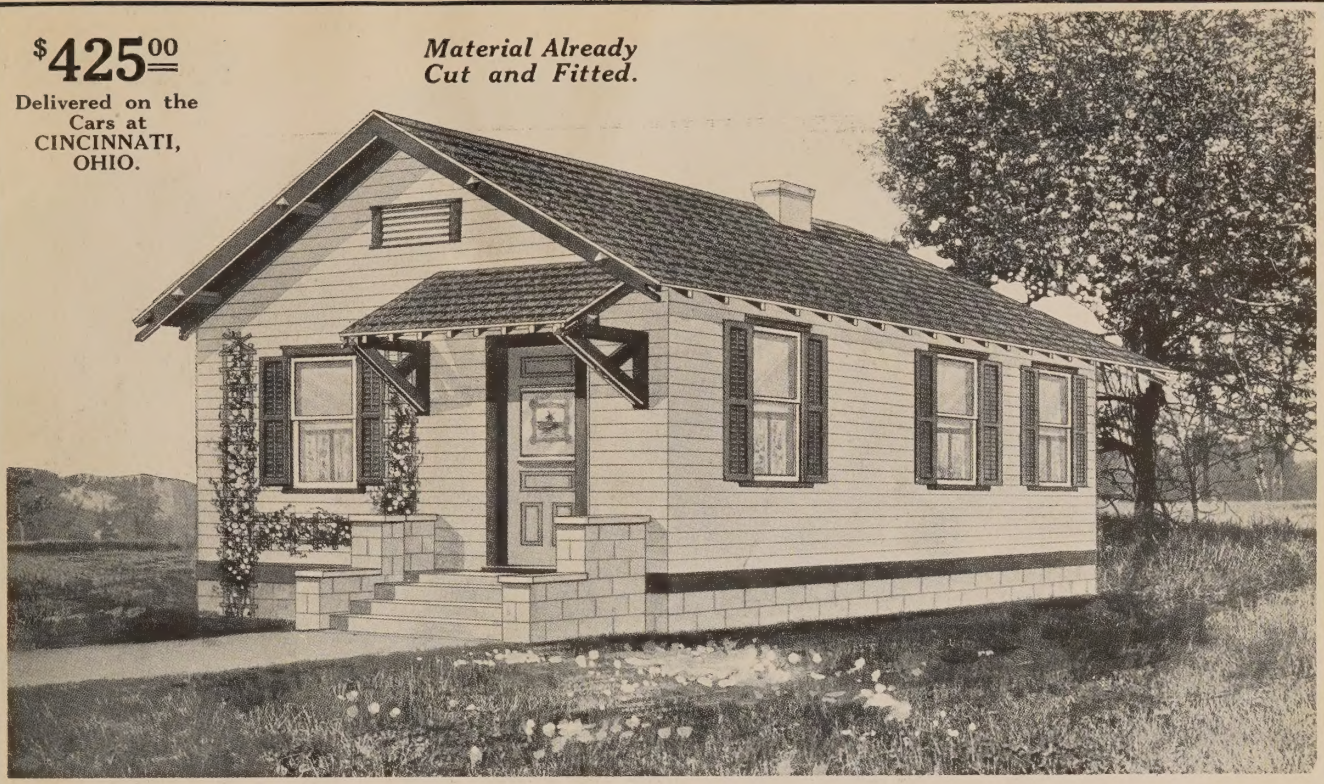

THE DOVECOTE. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $425.00 we will furnish all the material to build this Five-Room Double Built House, consisting of

LUMBER,
LATH,
NORWOOD SHINGLE ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick, plaster, blinds or trellis.

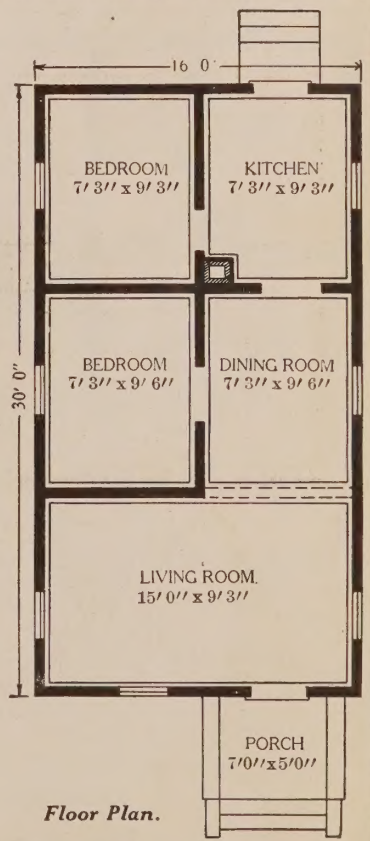

Floor Plan.

This house can be built on a lot 22 feet wide.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $42.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $8.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$506.00

Delivered on the Cars at CINCINNATI, OHIO

Material Already Cut and Fitted

THE VALENTINE. FOUR ROOMS

Complete Plans Furnished Free With Each Order.

For $506.00 we will furnish all the material to build this Four-Room Double Built House, consisting of

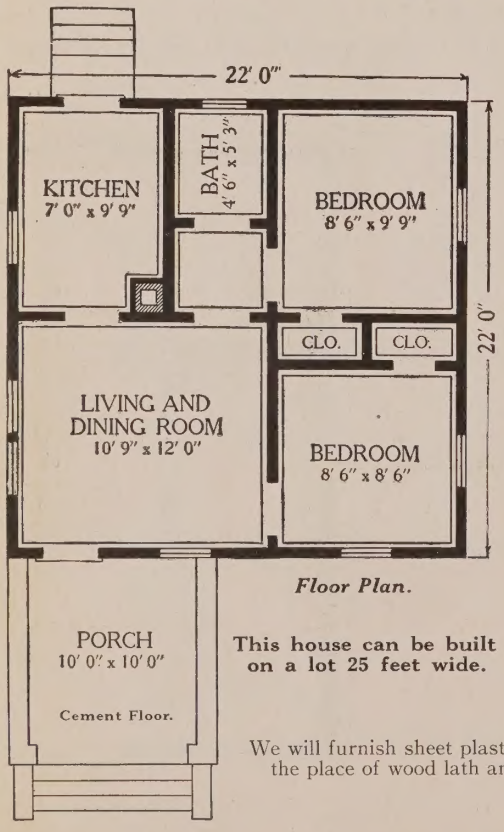

Floor Plan.

This house can be built on a lot 25 feet wide.

LUMBER,
LATH,
NORWOOD SHINGLE ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick, plaster or trellis.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $45.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $10.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$459.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted

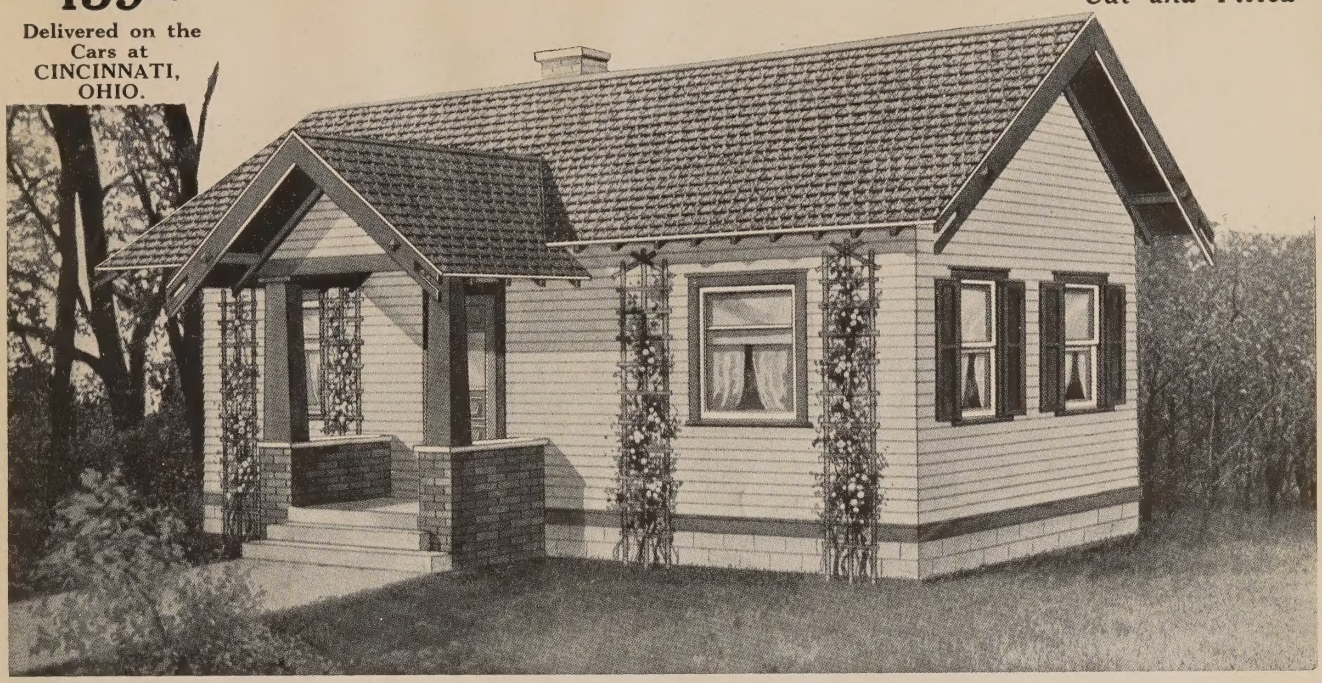

THE IVY. FOUR ROOMS

Complete Plans Furnished Free With Each Order.

For $459.00 we will furnish all the material to build this Four-Room Double Built House, consisting of

LUMBER,
LATH,
NORWOOD SHINGLE ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick, plaster, blinds or trellis.

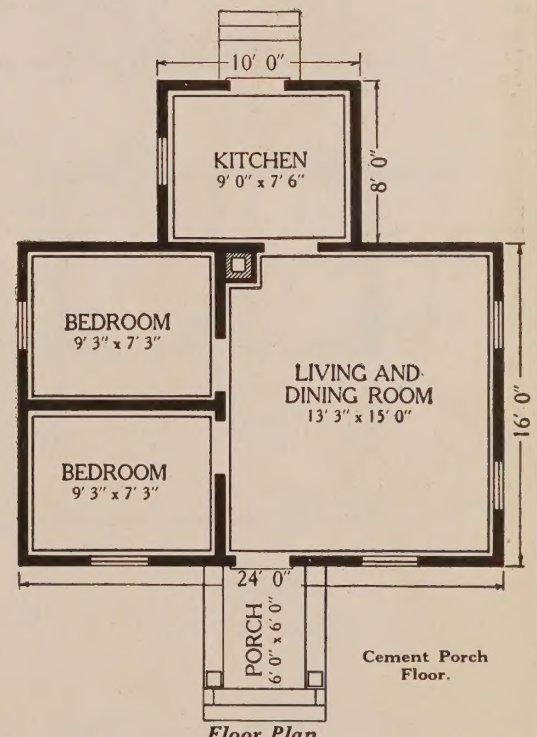

Cement Porch Floor.

Floor Plan.

This house can be built on a lot 30 feet wide.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $37.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $9.50 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$485.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE SUNBURST. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $485.00 we will furnish all the material to build this Five-Room Double Built House, consisting of

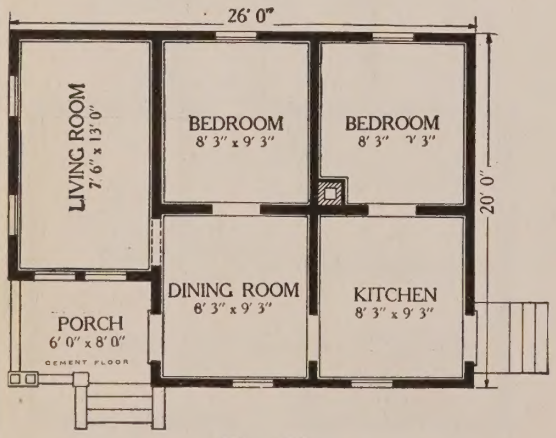

Floor Plan.

This house can be built on a lot 30 feet wide.

LUMBER,
LATH,
NORWOOD SHINGLE
ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick, plaster or trellis.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $38.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $7.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$491.00 *Material Already Cut and Fitted.*

Delivered on the Cars at CINCINNATI, OHIO.

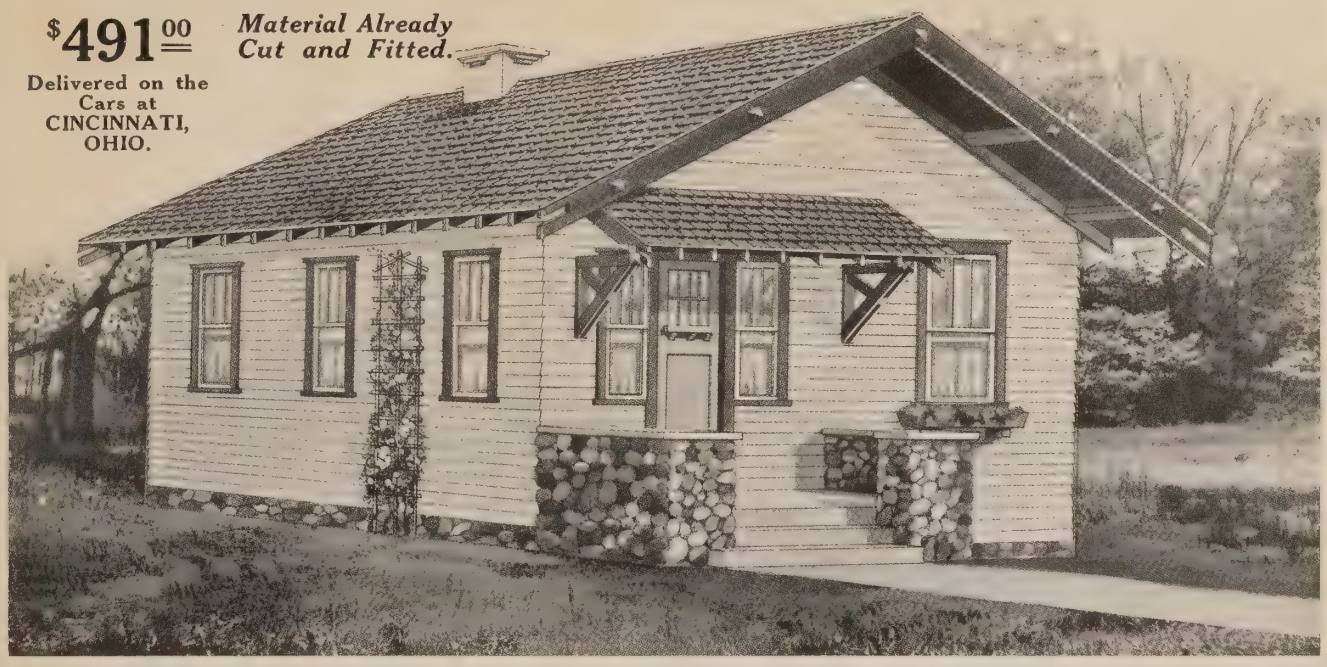

THE MORNING GLORY. FIVE ROOMS.

Complete Plans Furnished Free With Each Order.

For $491.00 we will furnish all the material to build this Five-Room Double Built House, consisting of

LUMBER,
LATH,
NORWOOD SHINGLE
ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE,
AND PAINTING
MATERIAL.

Floor Plan.

This house can be built on a lot 25 feet wide.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick, plaster or trellis.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $41.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $7.50 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

AVERY LIBRARY
COLUMBIA UNIVERSITY

$467.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE MISTLETOE. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $467.00 we will furnish all the material to build this Five-Room Double Built House, consisting of

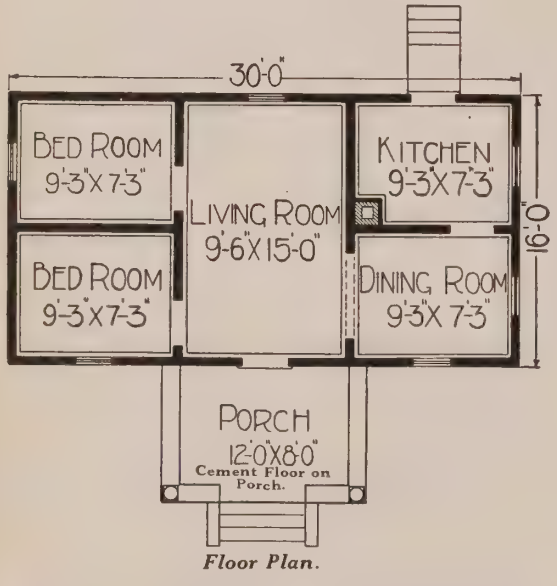

Floor Plan.

This house can be built on a lot 35 feet wide.

LUMBER, LATH, NORWOOD SHINGLE ROLL ROOFING, MILL WORK, DOORS, WINDOWS, MOLDING, FLOORING, CEILING, SIDING, FINISHING LUMBER, BUILDING PAPER, PIPE, GUTTER, SASH WEIGHTS, HARDWARE AND PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

This price does not include blinds or trellis.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $45.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $10.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$477.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

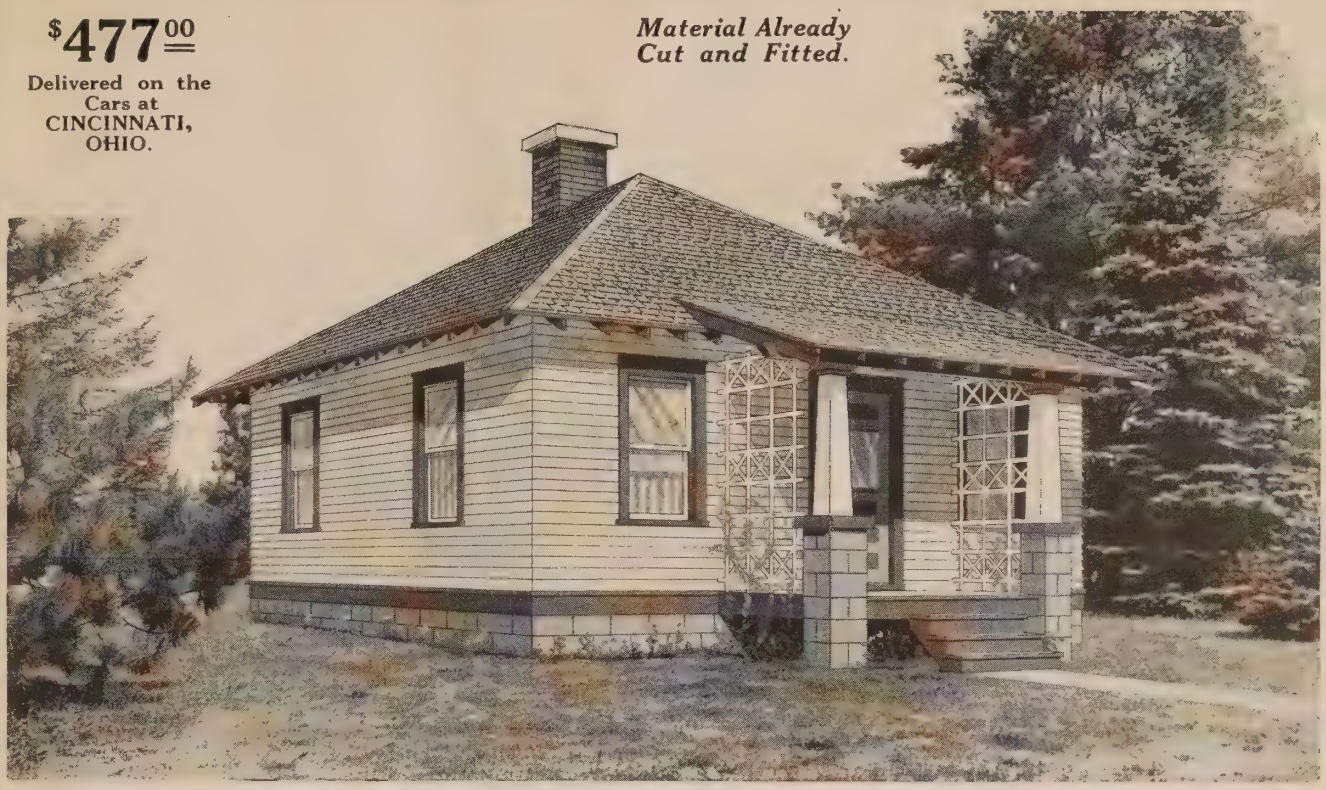

FORGET-ME-NOT. FOUR ROOMS

Complete Plans Furnished Free With Each Order.

For $477.00 we will furnish all the material to build this Four-Room Double Built House, consisting of

LUMBER,
LATH,
NORWOOD SHINGLE ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

Floor Plan.

This house can be built on a lot 30 feet wide.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $40.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $7.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$512.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted

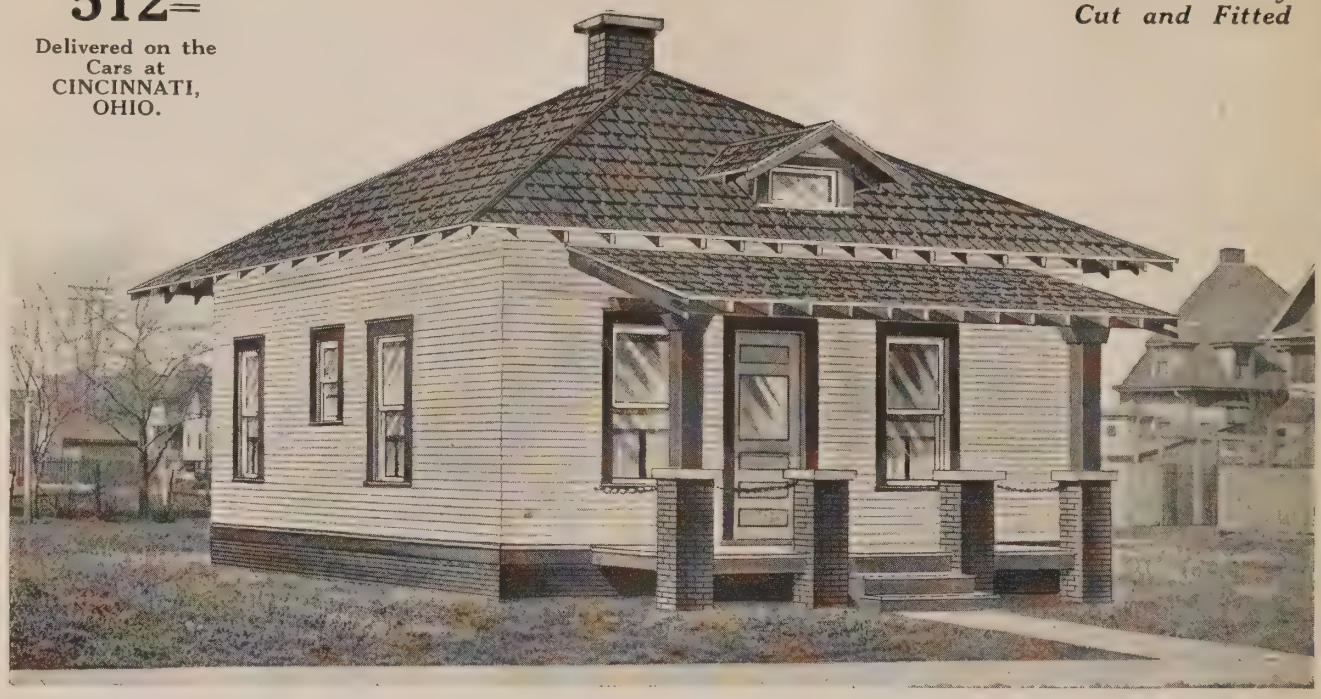

THE STORM KING. FOUR ROOMS

Complete Plans Furnished Free With Each Order.

For $512.00 we will furnish all the material to build this Four-Room Double Built House, consisting of

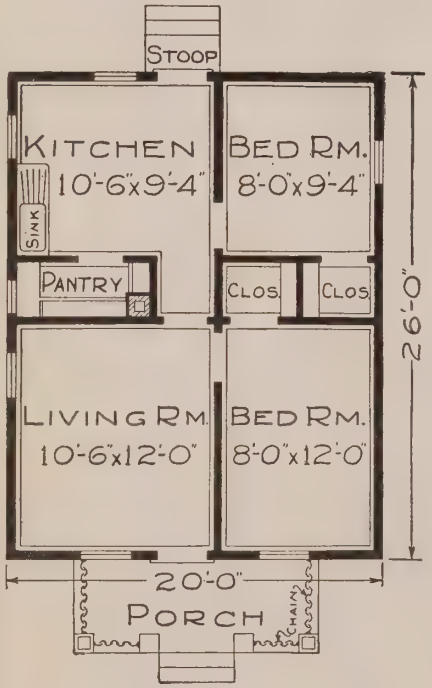

Floor Plan.

This house can be built on a lot 25 feet wide.

LUMBER, LATH,
MILL WORK,
DOORS, WINDOWS,
MOLDING,
FLOORING,
NORWOOD SHINGLE
ROLL ROOFING,
SIDING, CEILING,
FINISHING LUMBER,
EAVES TROUGH,
BUILDING PAPER,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $43.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $4.50 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$575.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted

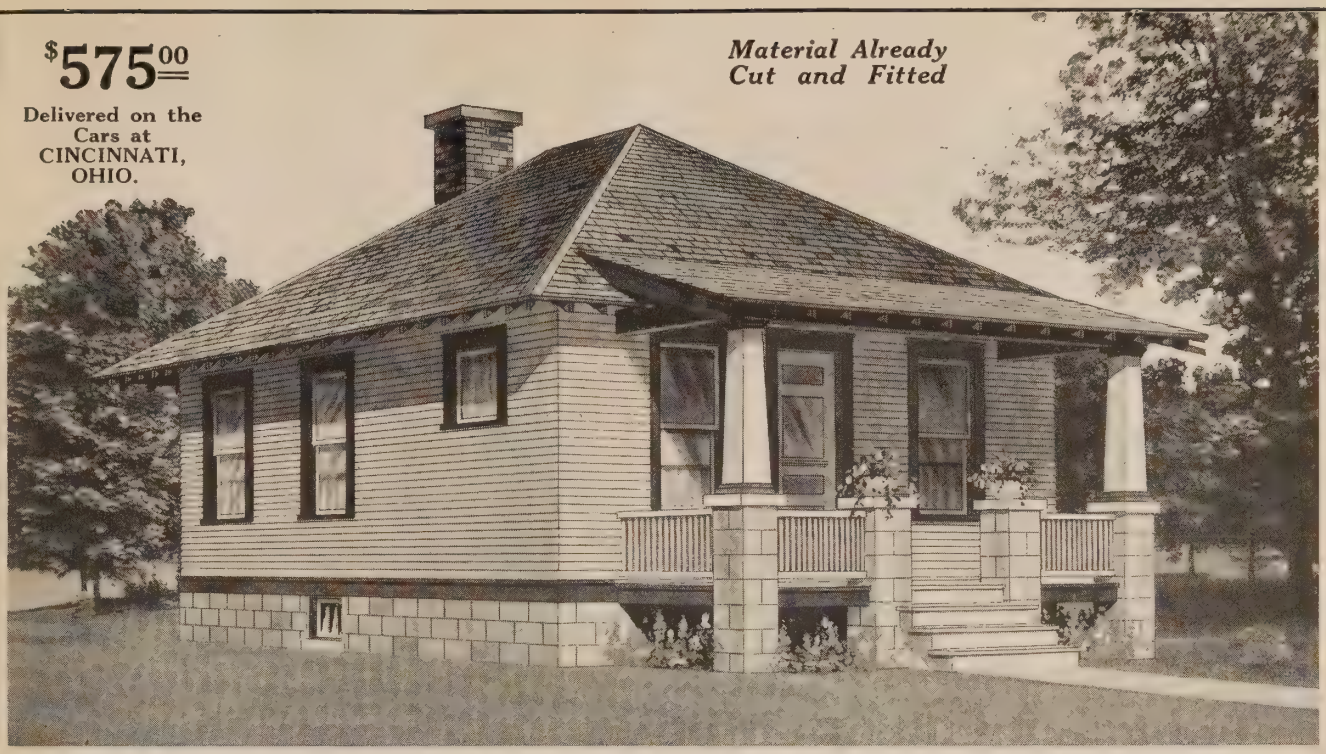

COZY CORNER. FOUR ROOMS

Complete Plans Furnished Free With Each Order.

For $575.00 we will furnish all the material to build this Four-Room Double Built Bungalow, consisting of

LUMBER, LATH,
SHINGLES,
MILL WORK,
DOORS, WINDOWS,
MOLDING,
CEILING, SIDING,
FLOORING,

FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND
PAINTING
MATERIAL.

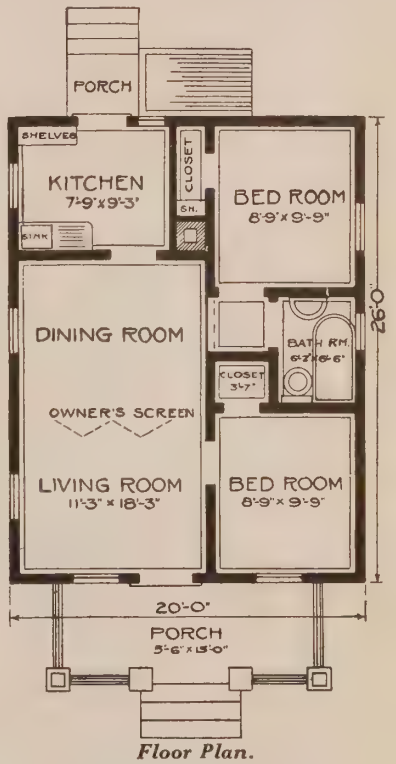

Floor Plan.

This house can be built on a lot 25 feet wide.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $50.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles for $6.50 less.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$574.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

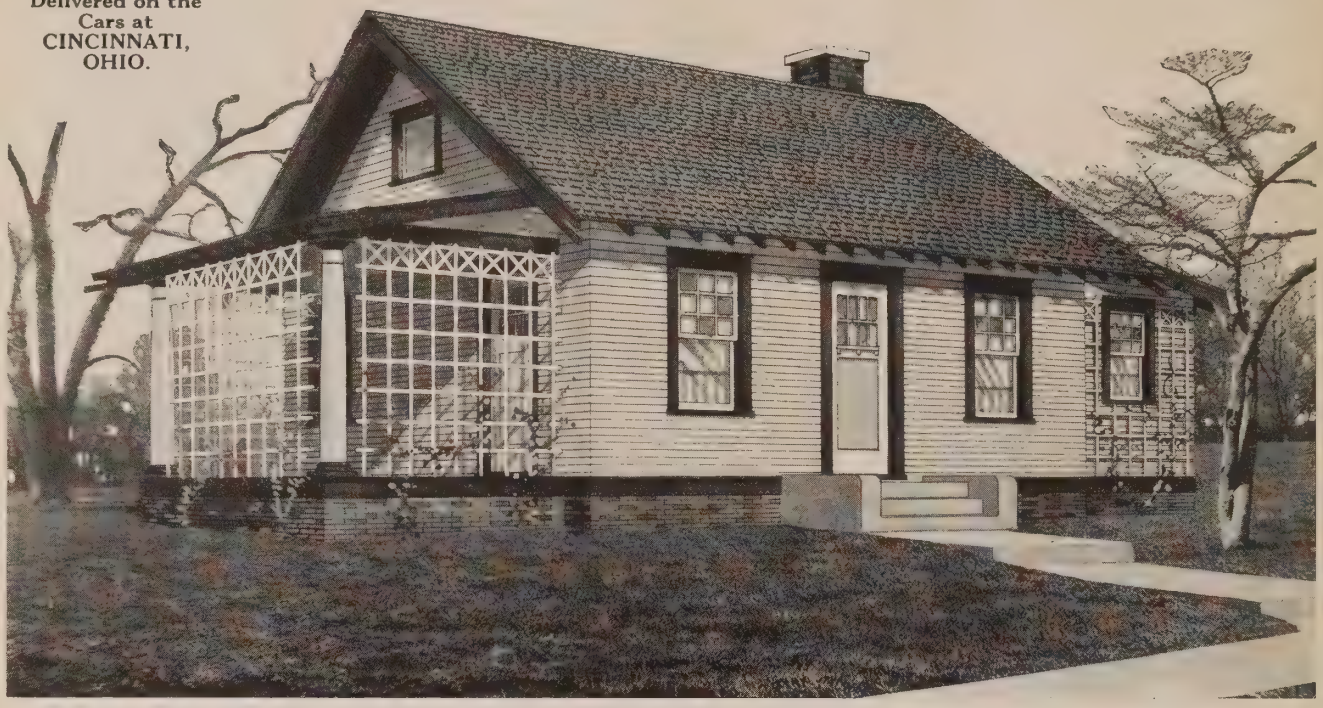

JENNY LIND. FOUR ROOMS

Complete Plans Furnished Free With Each Order.

For $574.00 we will furnish all the material to build this Four-Room Double Built House, consisting of

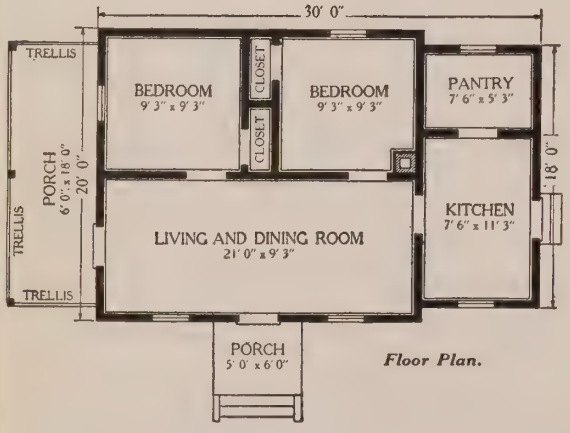

Floor Plan.

This house can be built on a lot 40 feet wide.

LUMBER,
LATH,
NORWOOD SHINGLE ROLL ROOFING,
DOORS,
WINDOWS,
MOLDING,
MILL WORK,
FLOORING.
CEILING,

SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE,
GUTTER,
SASH WEIGHTS,
HARDWARE AND PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick, plaster or trellis.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $50.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $10.55 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$795.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

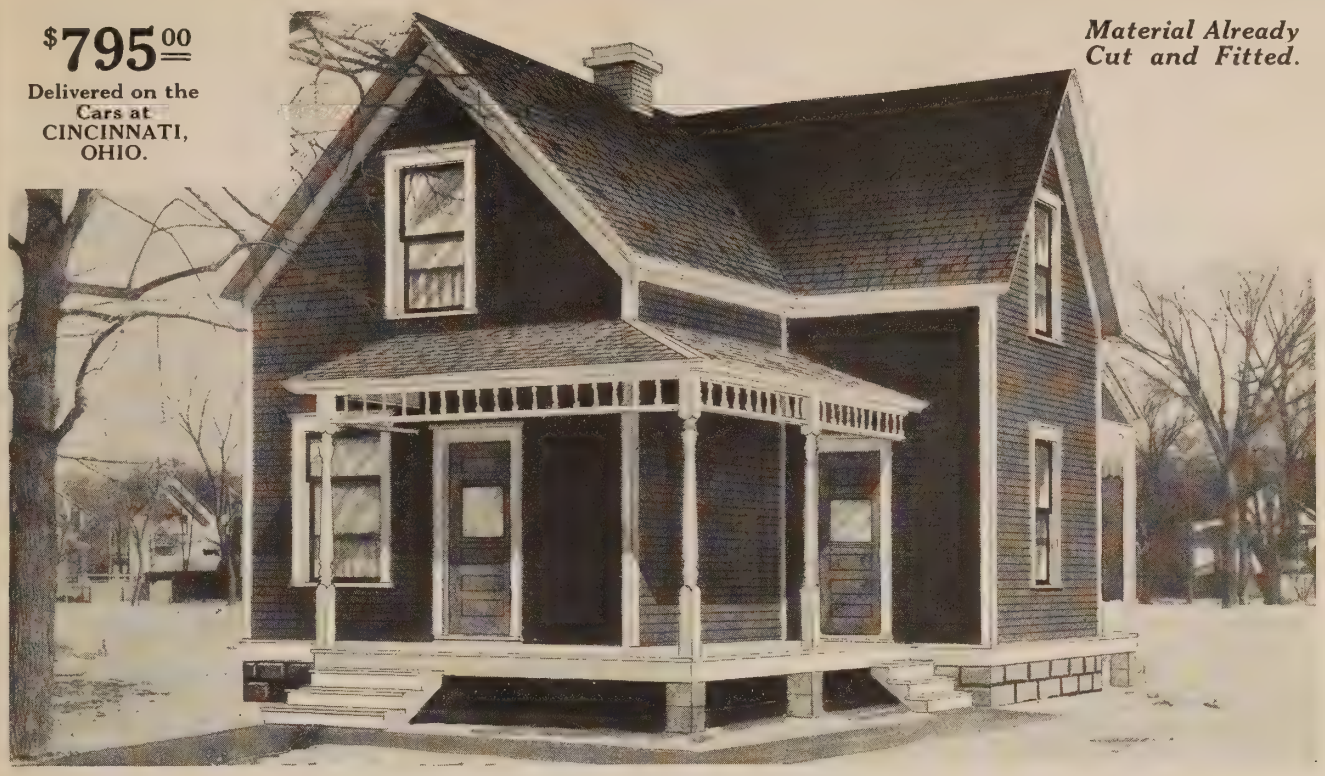

THE HICKORY. SIX ROOMS

Complete Plans Furnished Free With Each Order.

For $795.00 we will furnish all the material to build this cozy Six-Room Double Built House, consisting of

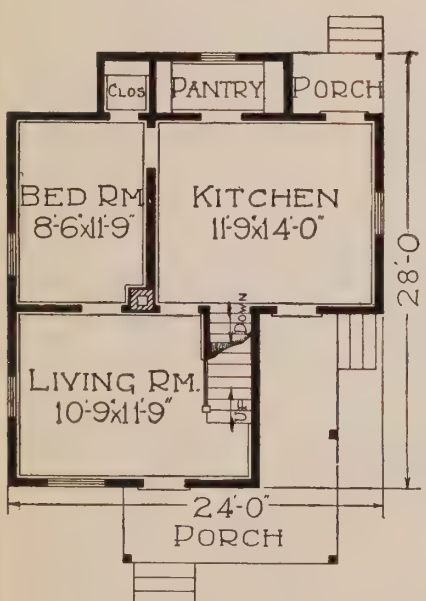

First Floor Plan.

**LUMBER, LATH,
SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
CEILING,
SIDING,
BUILDING PAPER,
EAVES TROUGH,
SASH WEIGHTS,
HARDWARE AND
PAINTING
MATERIAL.**

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 30 feet wide.

NORWOOD QUALITY

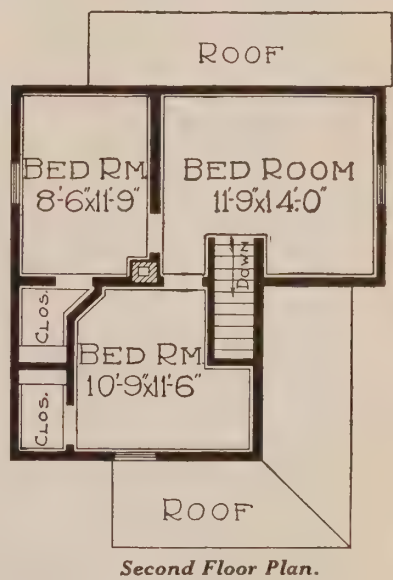

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $75.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $9.00 less.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$691.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

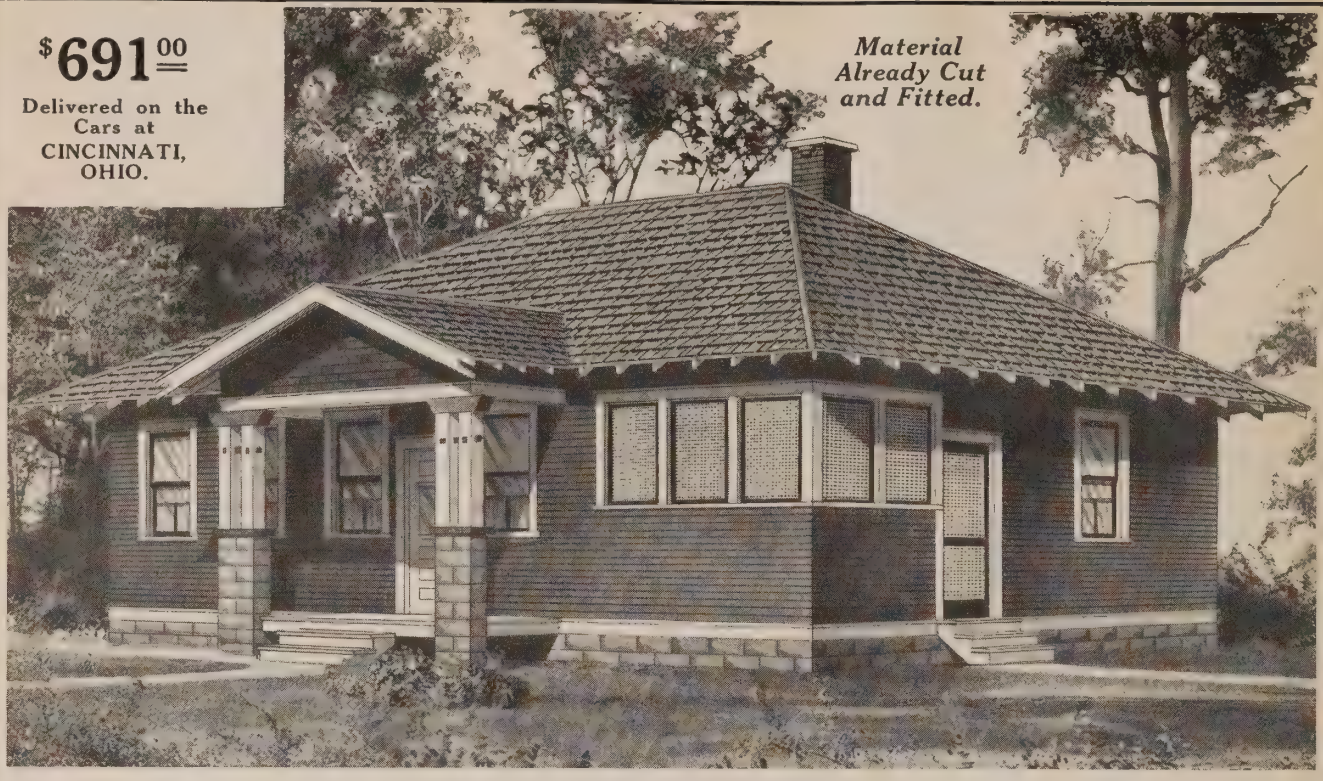

UNCLE SAM. FOUR ROOMS

Complete Plans Furnished Free With Each Order.

For $691.00 we will furnish all the material to build this Four-Room Double Built House with screened porch, consisting of

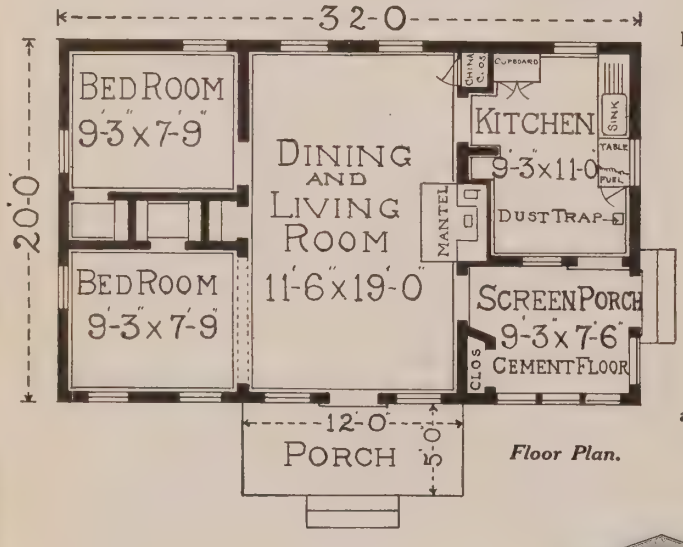

Floor Plan.

LUMBER,
LATH AND
SHINGLES,
NORWOOD SHINGLE
ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
CEILING,
SIDING,
FLOORING,

INTERIOR AND
EXTERIOR TRIM,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
MANTEL AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $50.00 extra.
We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $9.85 extra.
We will furnish extra material to change the screened porch into a bedroom, and add one extra outside kitchen door for $12.50 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

Interior Views, the Uncle Sam

THE LIVING ROOM AND DINING ROOM.

The two illustrations on this page will give you a fairly good idea of how nicely the combined living room and dining room and the kitchen of our Uncle Sam design can be furnished. There is no reason why the living room and dining room of this house is not just as comfortable and inviting as the living room and dining room in a much higher priced house. The kitchen is a lesson in economy, labor saving and cleanliness. You will note the dust trap in the right hand corner of the picture and the handy fuel box with the top of it used as a table in front of the window. You will observe also that the cupboard is only a few steps from the sink.

NORWOOD

This house was originally designed by United States architects. We have improved somewhat on the design by adding an additional door and porch on the front. This gives direct entrance from the outside to the living room so that guests can be received without taking them through the screened porch, as originally planned. The combined living room and dining room is lighted by four large windows, two in the front and two in the rear, so that there is plenty of light and ventilation. Note the massive, graceful mantel which we furnish without extra charge. The other articles of furniture are shown merely as suggestions and must be ordered extra.

Remember our guarantee applies not only to the quality of the material which we furnish, but also to the quantity. There will be plenty of everything to build this house according to our plans.

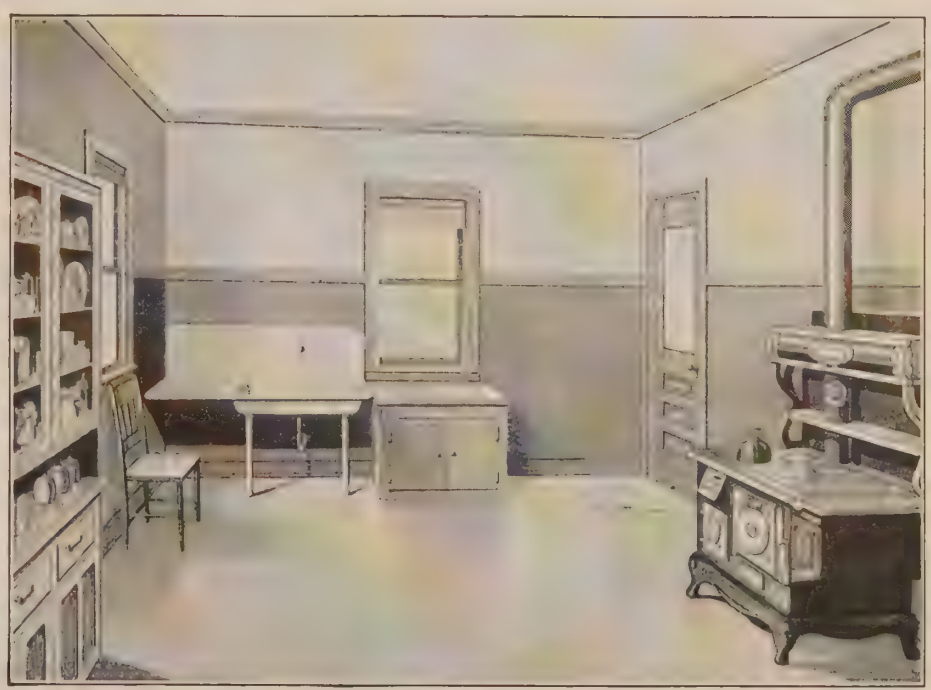

THE KITCHEN.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$787.00

Delivered on the Cars at CINCINNATI, OHIO

Material Already Cut and Fitted.

THE BEECH. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $787.00 we will furnish all the material to build this Five-Room Double Built Bungalow, consisting of

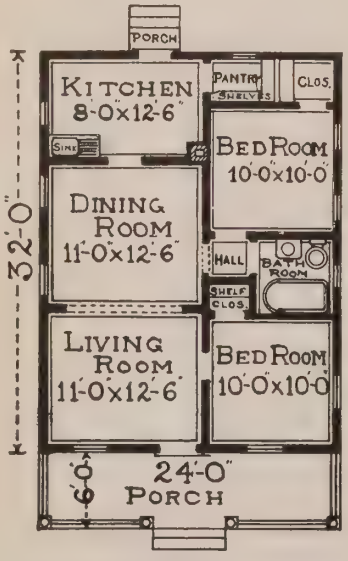

Floor Plan.

LUMBER, LATH,
SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
CEILING,
SIDING,
FLOORING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE,
GUTTER,
SASH WEIGHTS,
HARDWARE
AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

NORWOOD QUALITY

This house can be built on a lot 30 feet wide.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $65.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $9.50 less.

We will furnish oak doors, oak trim and oak floors for parlor and dining room for $30.00 extra.

We will furnish maple flooring for kitchen and pantry for $4.35 extra.

We will furnish material for basement stairs and basement windows for $17.50 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

LIVING ROOM AND DINING ROOM, THE BEECH

A low priced bungalow can be made attractive, inviting and comfortable in its interior. Our Beech design, the living room and dining room of which we illustrate on this page, makes a little home of which, with the correct treatment, any family can justly be proud.

Our part in enriching the interior of this bungalow consists in furnishing high grade flooring, casing and moldings. The owner and the housewife can do their part in the remainder of the furnishing, consisting of the lighting, decorating and furniture. To produce proper satisfactory results, a modest sum only is required.

NORWOOD

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$897.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE ELMS. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $897.00 we will furnish all the material to build this Five-Room Double Built House with bath, consisting of

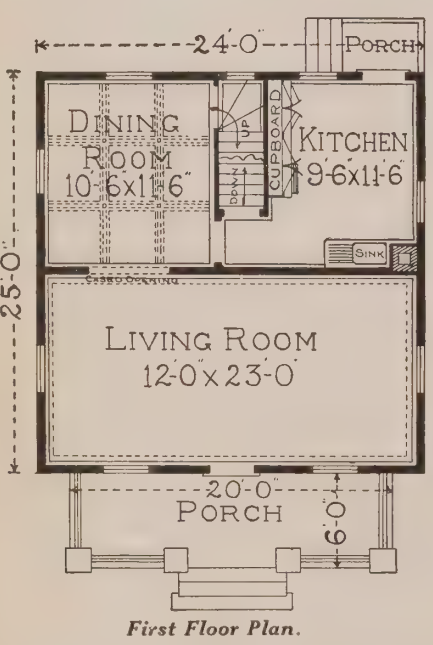

First Floor Plan.

LUMBER, LATH,
ROOFING, DOORS,
WINDOWS, MOLDING,
MILL WORK, FLOORING,
CEILING, SIDING,
FINISHING LUMBER,
PANTRY CASE,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE,
NAILS AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 30 feet wide.

NORWOOD QUALITY

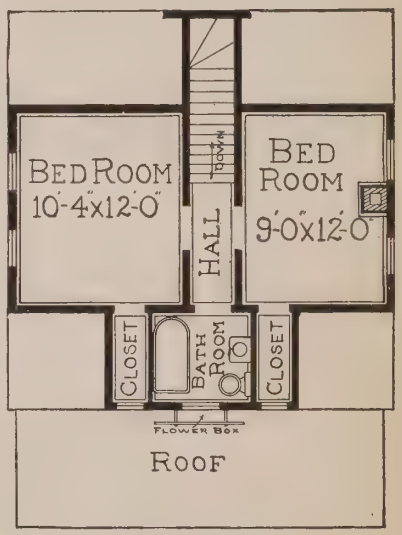

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $75.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $18.00 extra.

We will furnish oak doors, oak trim and oak floors for living room, dining room, instead of yellow pine, for $40.00 extra.

We will furnish maple flooring for kitchen instead of yellow pine for $4.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$842.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

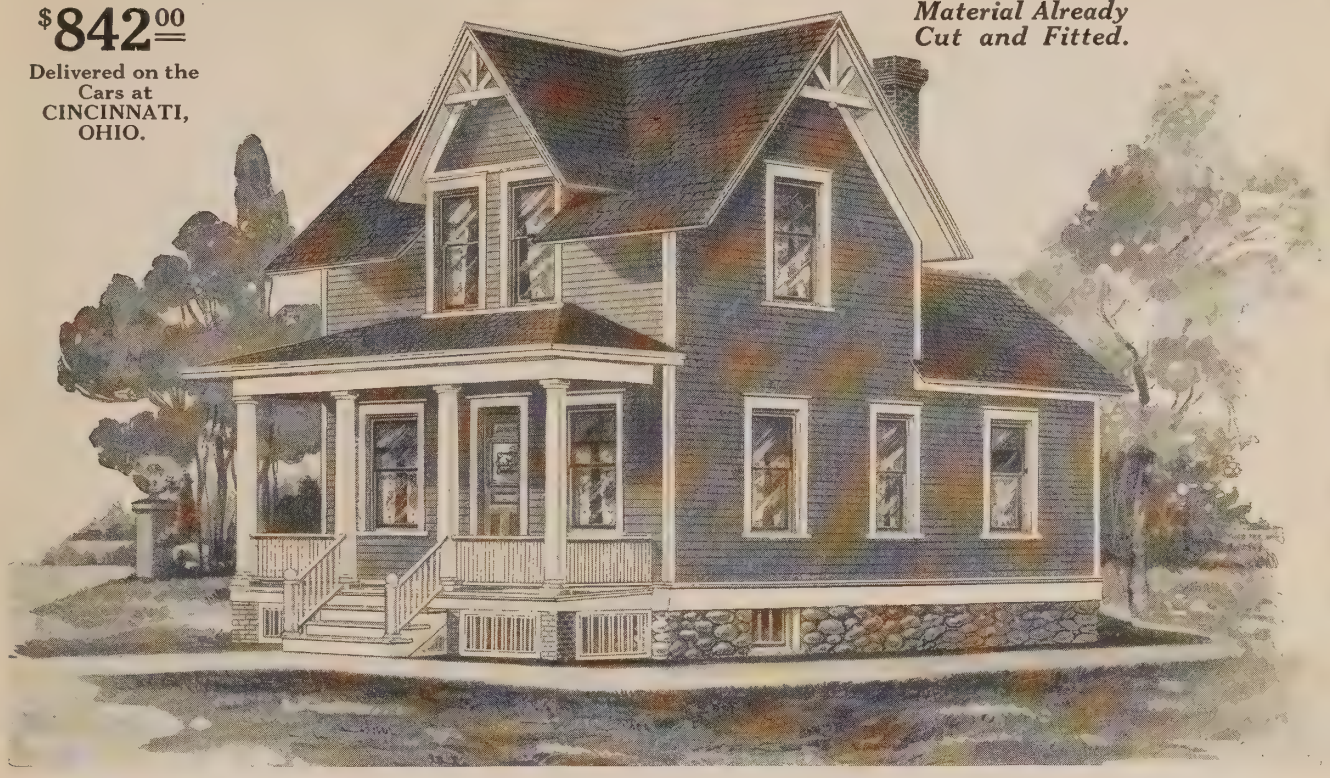

THE ROYAL OAK. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $842.00 we will furnish all the material to build this Five-Room Double Built House, consisting of

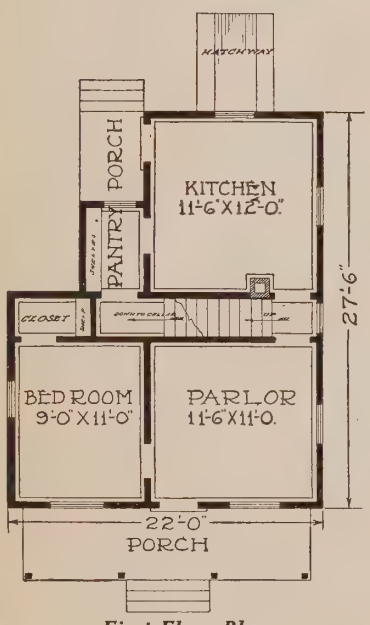

First Floor Plan.

LUMBER,	CEILING,
LATH,	FINISHING LUMBER,
SHINGLES.	BUILDING PAPER,
MILL WORK,	PIPE,
DOORS,	GUTTER,
WINDOWS,	SASH WEIGHTS,
MOLDING,	HARDWARE AND
SIDING,	PAINTING
FLOORING,	MATERIAL

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 28 feet wide.

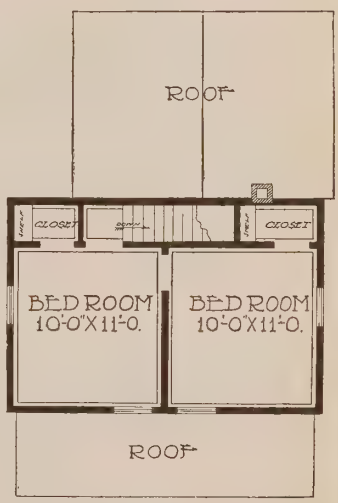

Second Floor Plan.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $79.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $10.00 less.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio

(Norwood Station)

$826.00
Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

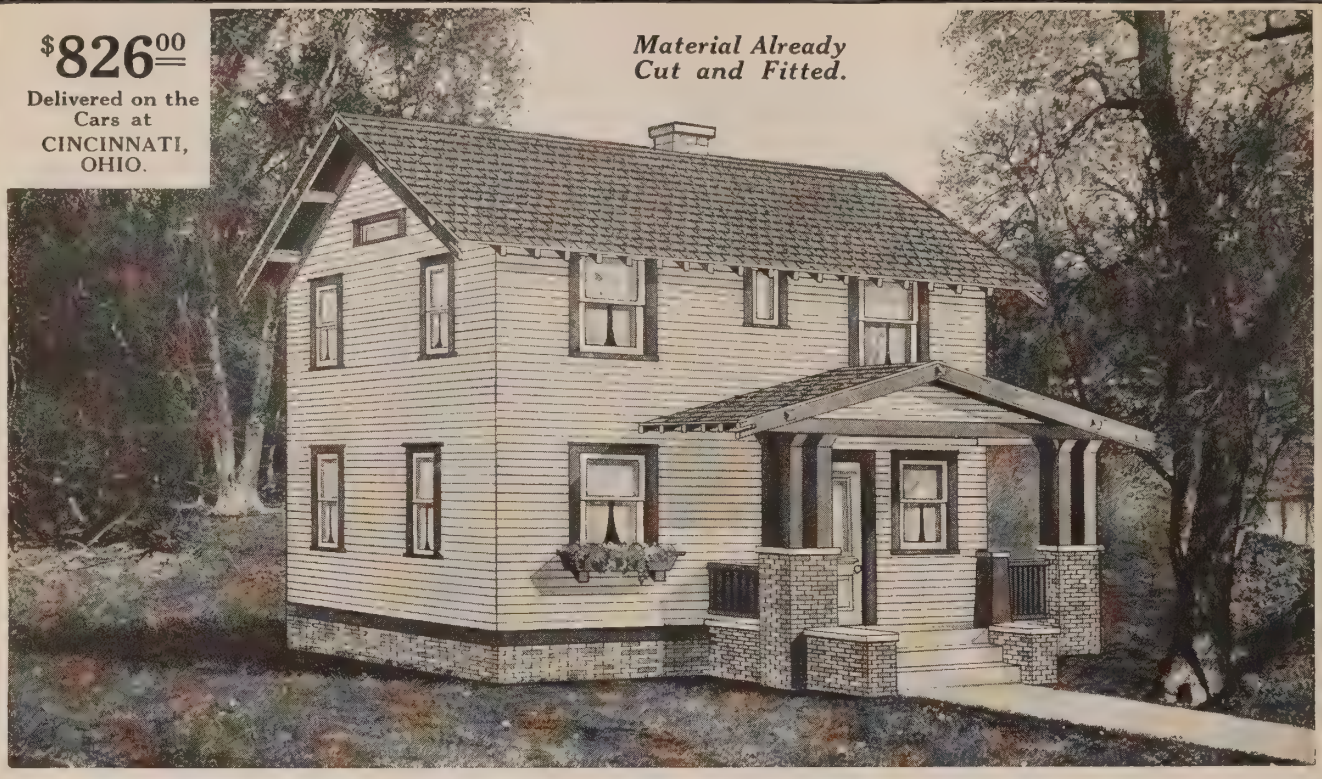

THE ARK. SEVEN ROOMS

Complete Plans Furnished Free With Each Order.

For $826.00 we will furnish all the material to build this Seven-Room Double Built House, consisting of

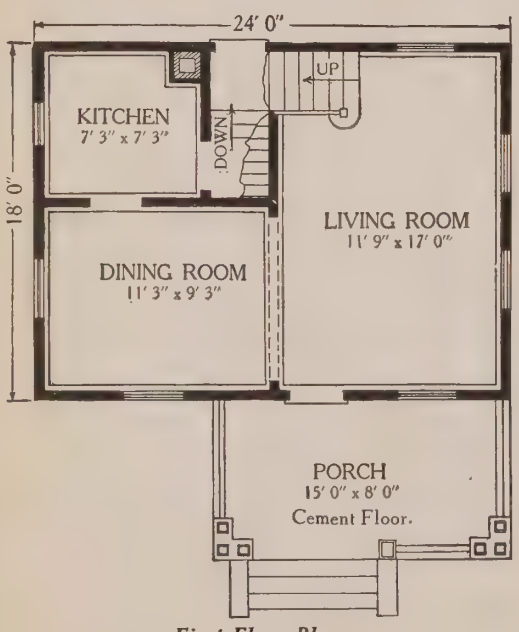

First Floor Plan.

LUMBER, LATH, NORWOOD SHINGLE ROLL ROOFING, MILL WORK, DOORS, WINDOWS, MOLDING, FLOORING, CEILING,

SIDING, FINISHING LUMBER, BUILDING PAPER, PIPE, GUTTER, SASH WEIGHTS, HARDWARE AND PAINTING MATERIAL.

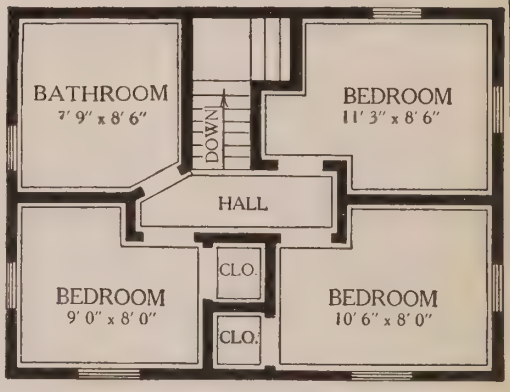

Second Floor Plan.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 30 feet wide.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $75.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $9.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$924.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

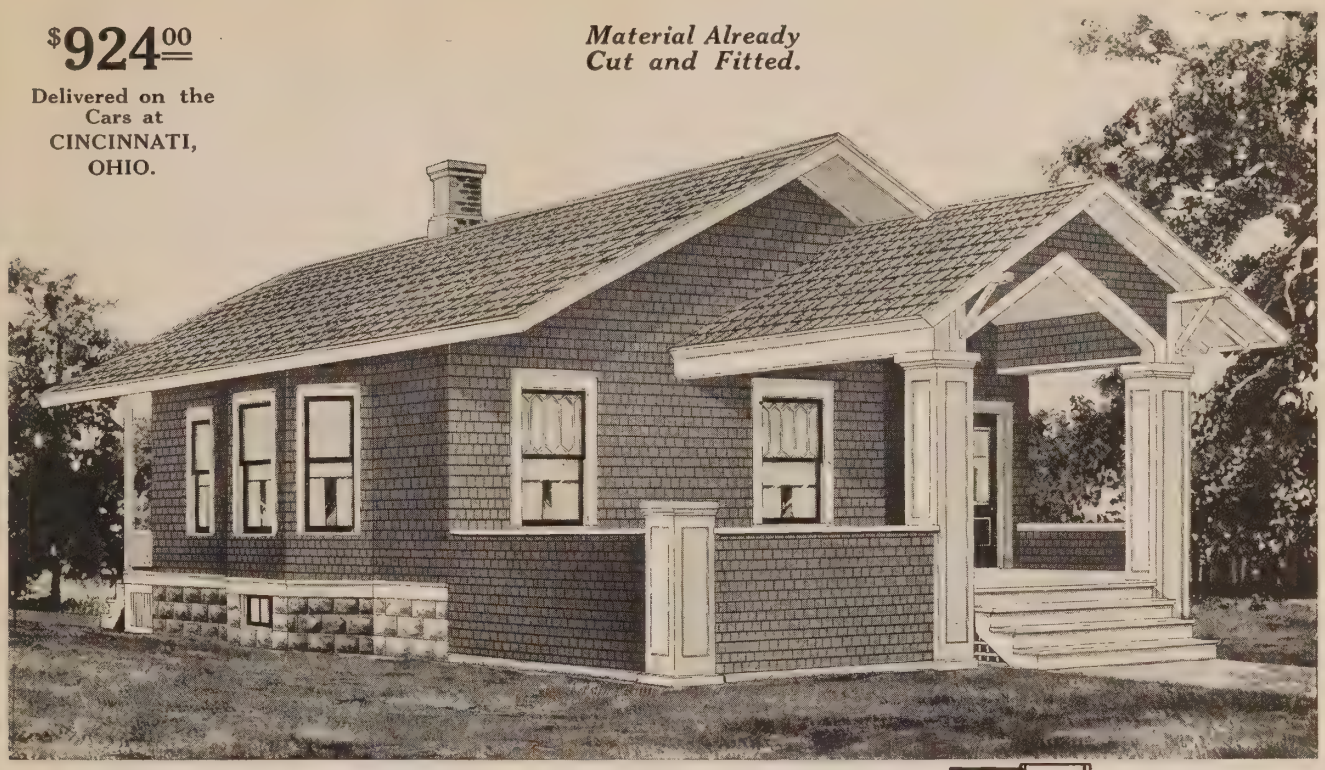

THE MAYFLOWER. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $924.00 we will furnish all the material to build this Five-Room Double Built Bungalow, consisting of

LUMBER,
LATH,
SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE,
GUTTER,
SASH WEIGHTS,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 30 feet wide.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $81.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $14.00 less.

We will furnish oak doors, oak trim and oak floors for the vestibule, living room and dining room for $46.00 extra.

We will furnish cypress bevel siding for outside walls instead of shingles for $4.00 extra.

We will furnish maple flooring for kitchen and pantry for $4.00 extra.

Floor Plan.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$997.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

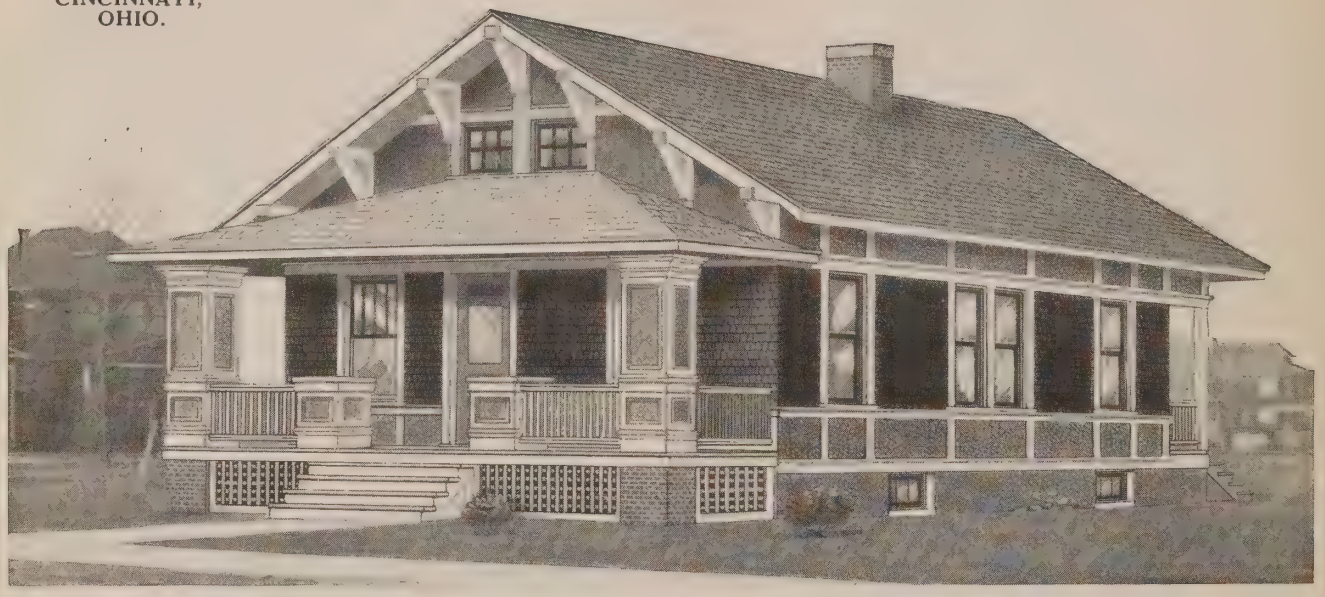

THE BLUEBIRD. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $997.00 we will furnish all the material to build this Five-Room Double Built Cottage, consisting of

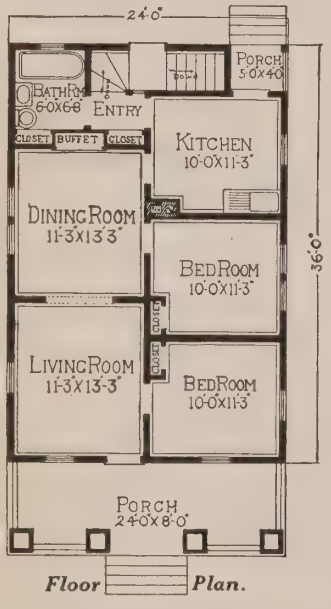

Floor Plan.

This house can be built on a lot 30 feet wide.

LUMBER,
LATH,
SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
SIDING,
CEILING,
FLOORING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE,
BUFFET AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $74.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $15.00 less.

We will furnish oak doors, oak trim and oak floors in living room and dining room for $45.00 extra.

We will furnish maple flooring for kitchen, entry and bathroom for $7.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

Dining Room, the Bluebird

In all of our houses we have aimed to save as many steps as possible for the housewife. This idea has been especially borne in mind in laying out the floor plans for our Bluebird design. The dining room illustrated above is within easy access of both living room and kitchen.

The high quality of the materials which we furnish for the interior of this bungalow can easily be seen in the beautiful grain shown in the sideboard and trim. All our trim is perfectly machined, ready for stain and varnish. Our flooring will give a beautiful luster when properly treated. The doors are specially selected for fine interior finish so that the owner can be proud to bring his friends through every room in this modern bungalow.

The attractive sideboard which we furnish without extra charge with the materials makes it easy for the owner to get this dining room ready for occupancy. Note our suggestions for up to date lighting.

NORWOOD

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,092.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE MONITOR. SIX ROOMS

Complete Plans Furnished Free With Each Order.

$1,092.00 buys all the material to build this Six-Room Double Built House, consisting of

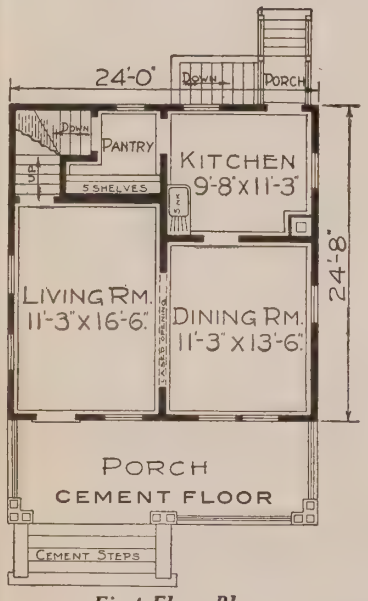

First Floor Plan.

LUMBER, SIDING,
LATH, FINISHING LUMBER,
SHINGLES, BUILDING PAPER,
MILL WORK, PIPE,
DOORS, GUTTER,
WINDOWS, SASH WEIGHTS,
MOLDINGS, HARDWARE AND
FLOORING, PAINTING
CEILING, MATERIAL.

We guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 30 feet wide.

NORWOOD QUALITY

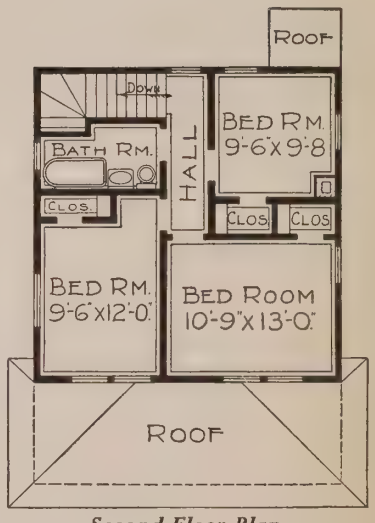

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $108.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $15.00 less.

We will furnish oak doors, oak trim and oak floors for living room and dining room for $38.00 extra.

We will furnish maple flooring for kitchen, pantry and bathroom for $7.20 extra.

We will furnish wood floor for the porch instead of cement for $19.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,268.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE MERRIMAC. EIGHT ROOMS

Complete Plans Furnished Free With Each Order.

For $1,268.00 we will furnish all the material to build this Eight-Room Double Built House, consisting of

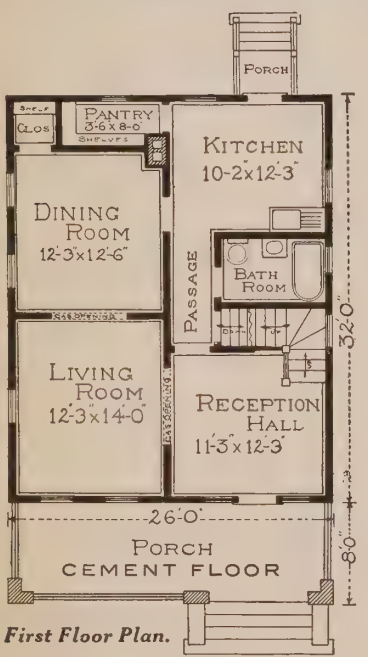

First Floor Plan.

LUMBER, SIDING,
LATH, FINISHING LUMBER,
SHINGLES, BUILDING PAPER,
MILL WORK, PIPE,
FLOORING, GUTTER,
DOORS, SASH WEIGHTS,
WINDOWS, HARDWARE AND
MOLDING, PAINTING
CEILING, MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 32 feet wide.

NORWOOD QUALITY

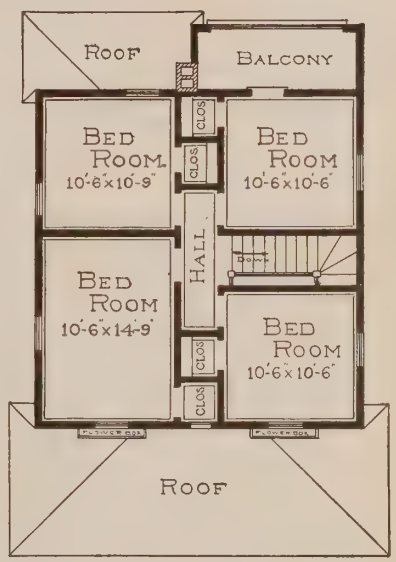

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $127.00 extra.
We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $14.00 less.
We will furnish oak doors, oak trim and oak floors for living room, dining room, reception hall and oak stairs for $65.00 extra.
We will furnish maple flooring for kitchen, pantry and bathroom for $7.00 extra.
We will furnish material tc construct the front porch floor of wood instead of cement for $18.30 extra.
We will furnish material to enlarge the second floor to the same size as the first floor, and put bathroom on second floor for $55.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,064.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE EMPRESS. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $1,064.00 we will furnish all the material to build this Five-Room Double Built Bungalow, consisting of

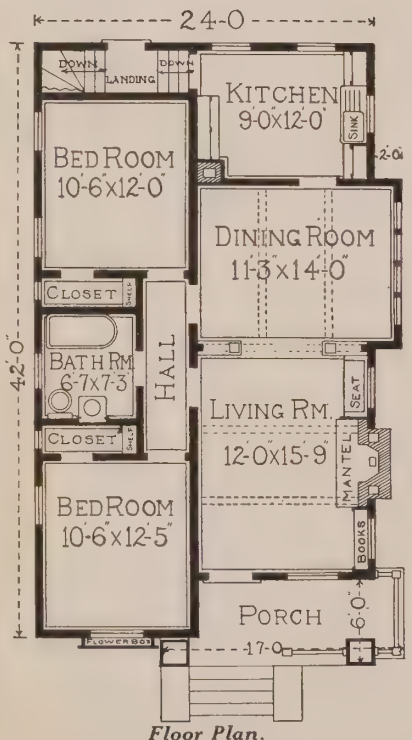

Floor Plan.

Can be built on a lot 33 feet wide.

LUMBER,
LATH, SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
FINISHING LUMBER,
BUILDING PAPER,
SASH WEIGHTS,
PIPE, GUTTER,
CABINETS,
KITCHEN CUPBOARD,
MEDICINE CASE,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material to build this bungalow according to our plans.

Price does not include cement, brick or plaster.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $75.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $16.00 less.

We will furnish oak doors, oak trim and oak floors for living room and dining room for $42.00 extra.

We will furnish maple flooring for kitchen and bathroom for $4.90 extra.

We will furnish wood floor for the porch instead of cement for $9.50 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

Interior Views, the Empress

EVERY

ITEM

STRICTLY

HIGH

CLASS

NORWOOD

Living Room and Dining Room.

The Empress is a bungalow whose exterior appearance suggests extra fine interior arrangement and furnishings. The front elevation, as you glance at it, bespeaks richness and comfort on the inside. A glance at the illustration of the living room and dining room above proves this conclusively. Note the bookcase colonnade, the beamed ceiling, the massive brick mantel with the built-in bookcase on the side. Note also the extra depth of the living room and dining room, nearly 30 feet long. "A $3,000.00 house," you might say, and you would not be very far wrong, if it were built in the ordinary way. Yet by our modern merchandising methods, we are able to furnish the materials for only $1,064.00.

The Bathroom.

The illustration to the right speaks for itself. The bathroom is in keeping with the high class construction and furnishings of every room in this up to date bungalow.

Our customers are proud to show their houses to their friends and we believe that the two illustrations on this page explain the reason why. Our homes are homes of quality—homes that can be built with a big saving in labor, time and money.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$861.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE ORIOLE. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $861.00 we will furnish all the material to build this Five-Room Double Built House, consisting of

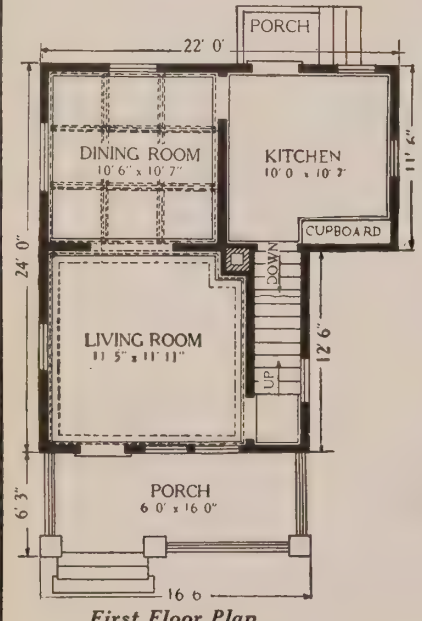

First Floor Plan.

LUMBER, LATH,
NORWOOD SHINGLE
ROLL ROOFING,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 27 feet wide.

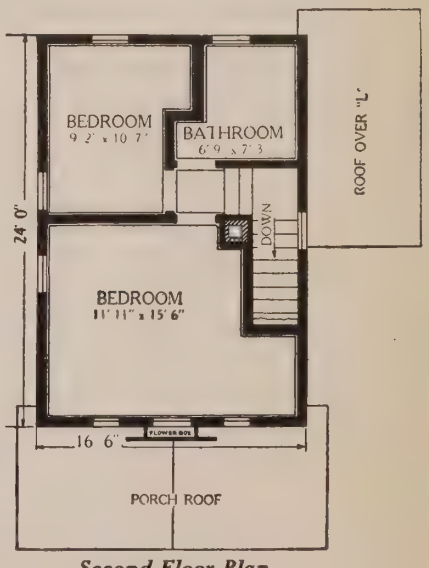

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $77.00 extra.

We will furnish cedar shingles instead of Norwood Shingle Roll Roofing for $13.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,102.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

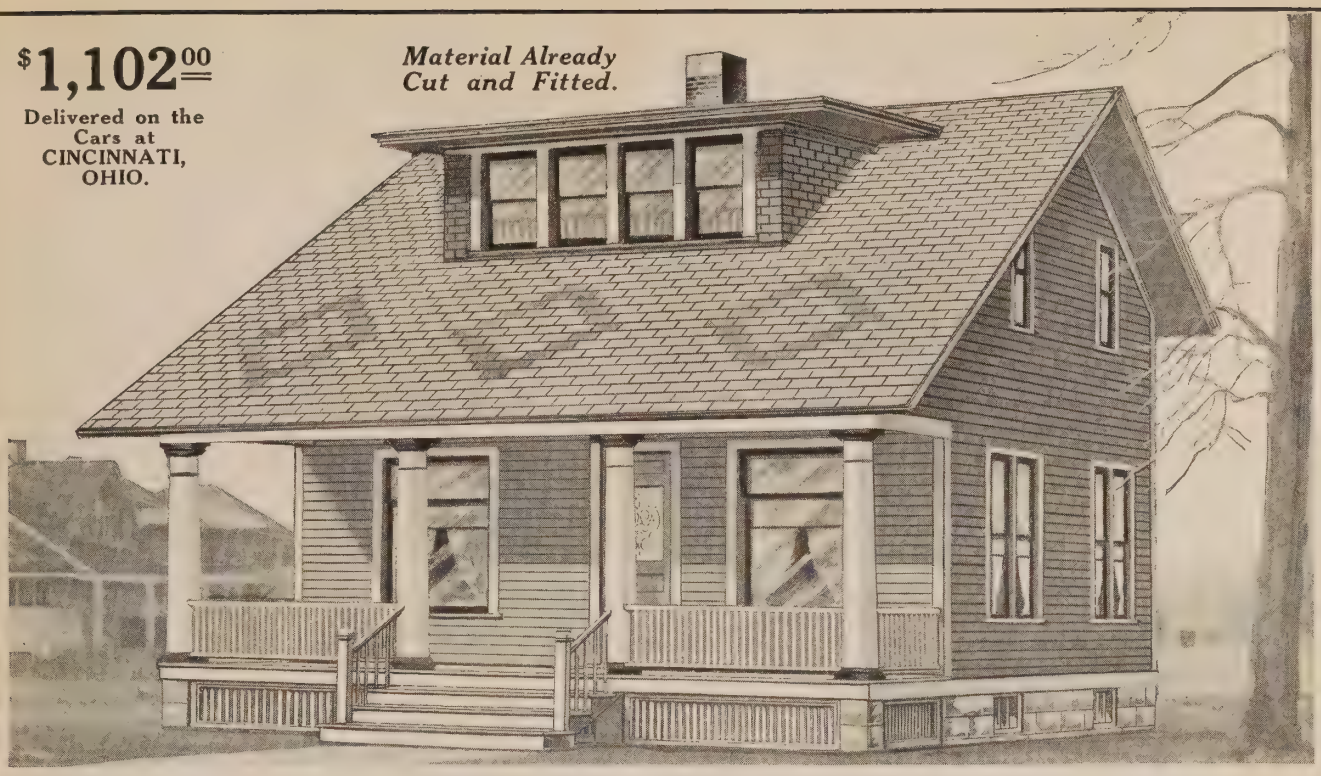

THE PRINCESS. SIX ROOMS

Complete Plans Furnished Free With Each Order.

For $1,102.00 we will furnish all the material to build this Six-Room Double Built Bungalow, consisting of

First Floor Plan.

LUMBER, LATH,
SHINGLES,
MILL WORK,
DOORS, WINDOWS,
MOLDING,
FLOORING,
CEILING, SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE,
BUFFET AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 30 feet wide.

NORWOOD QUALITY

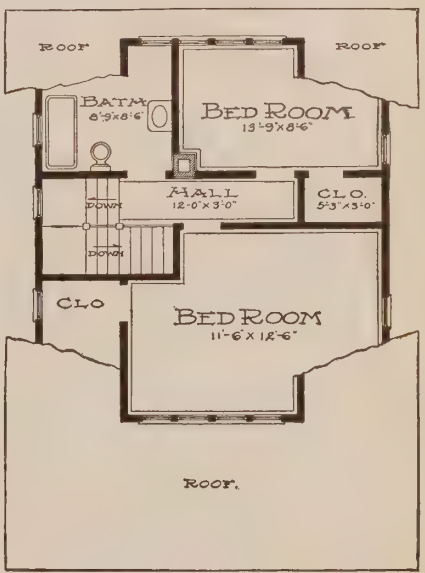

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $107.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $13.50 less.

We will furnish oak doors, oak trim and oak floors for parlor and dining room for $40.00 extra.

We will furnish maple flooring for kitchen, pantry and bath room for $6.80 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,064.00 *Material Already Cut and Fitted.*

Delivered on the Cars at CINCINNATI, OHIO.

THE CHICAGO. SIX ROOMS

Complete Plans Furnished Free With Each Order.

For $1,064.00 we will furnish all the material to build this Six-Room Double Built Cottage, consisting of

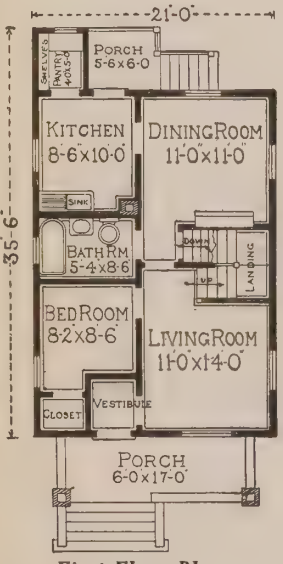

First Floor Plan.

LUMBER,
LATH,
SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,

FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
SIDING,
HARDWARE AND
PAINTING
MATERIAL

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 27 feet wide.

NORWOOD QUALITY

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $105.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $10.00 less.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,144.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

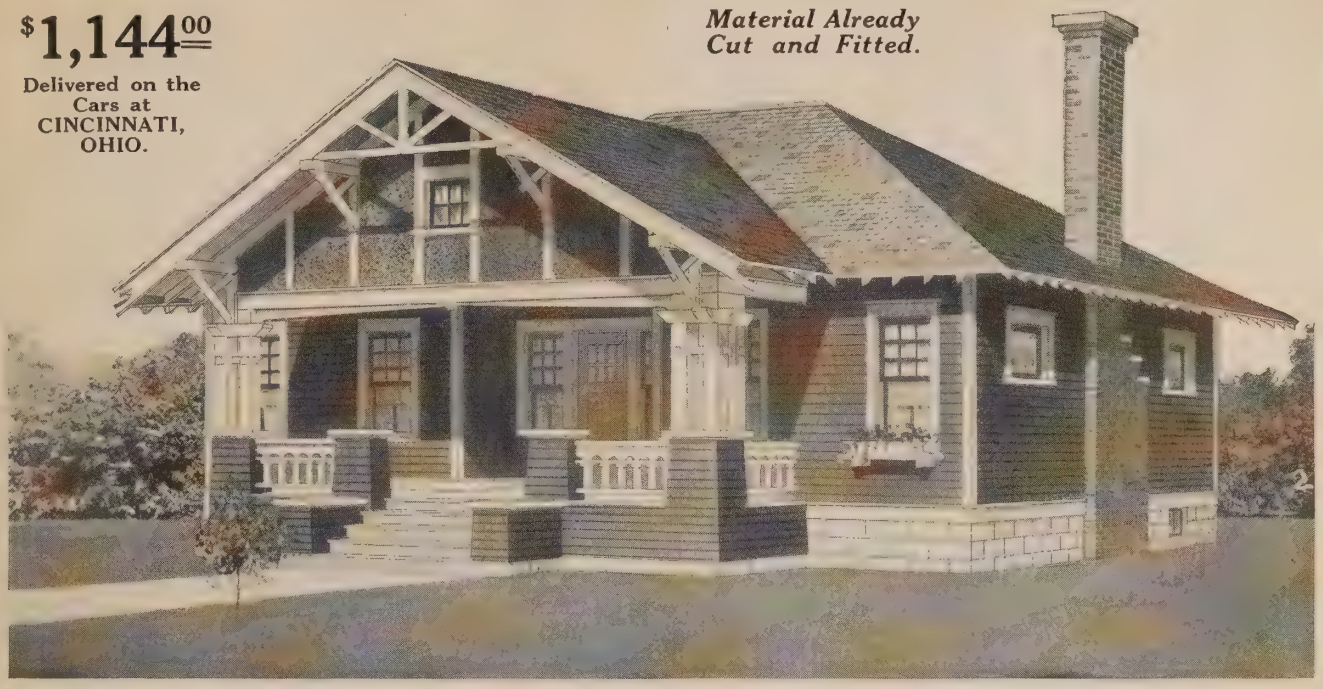

THE BOSTON. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $1,144.00 we will furnish all the material to build this Five-Room Double Built Bungalow, consisting of

LUMBER,
LATH,
SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
FINISHING LUMBER,

BUILDING PAPER,
PIPE,
GUTTER,
SASH WEIGHTS,
MANTEL,
HARDWARE,
AND
PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $80.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $15.00 less.

We will furnish oak doors, oak trim and oak floors for hall and living room for $49.61 extra.

We will furnish maple flooring for kitchen and bathroom for $6.50 extra.

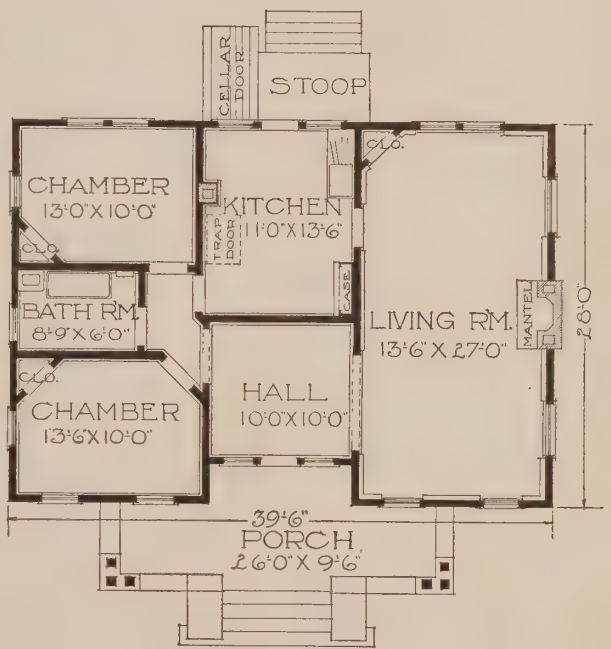

Floor Plan.

This house can be built on a lot 48 feet wide.

NORWOOD QUALITY

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

Material Already Cut and Fitted.

$1,137.00
Delivered on the Cars at CINCINNATI, OHIO.

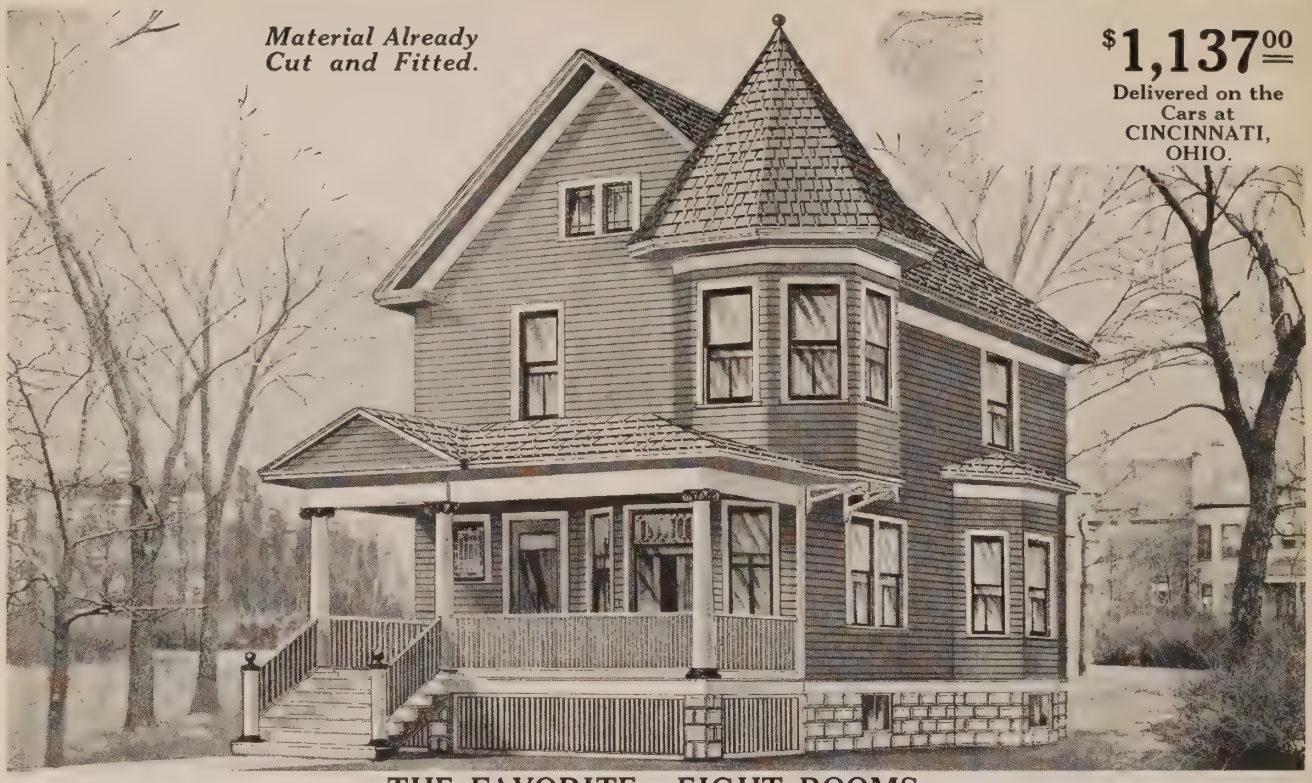

THE FAVORITE. EIGHT ROOMS

Complete Plans Furnished Free With Each Order.

For $1,137.00 we will furnish all the material to build this Eight-Room Double Built House, consisting of

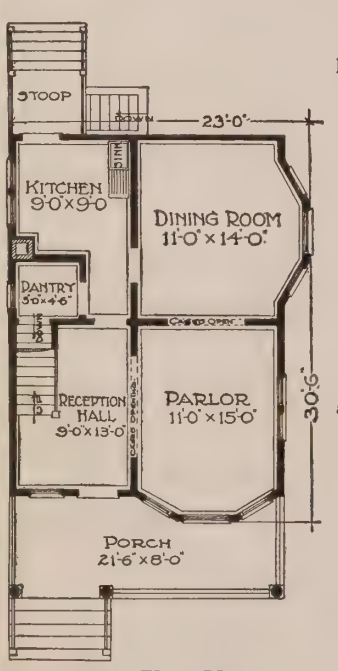

First Floor Plan.

LUMBER, SHINGLES, LATH, MILL WORK, DOORS, WINDOWS, MOLDING, FLOORING, CEILING, SIDING, FINISHING LUMBER, BUILDING PAPER, PIPE, GUTTER, SASH WEIGHTS, HARDWARE AND PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Can be furnished 2 feet wider for $45.00 extra.

Price does not include cement, brick or plaster.

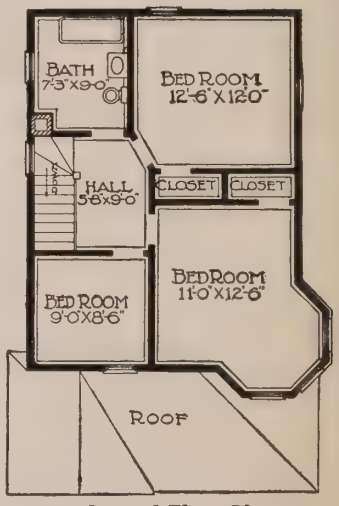

Second Floor Plan.

This house can be built on a lot 30 feet wide.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $106.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $14.50 less.

We will furnish oak doors, oak trim and oak floors for living room, dining room, hall and oak stairs for $55.00 extra.

We will furnish maple flooring for kitchen, pantry and bathroom for $5.50 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,136.00
Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

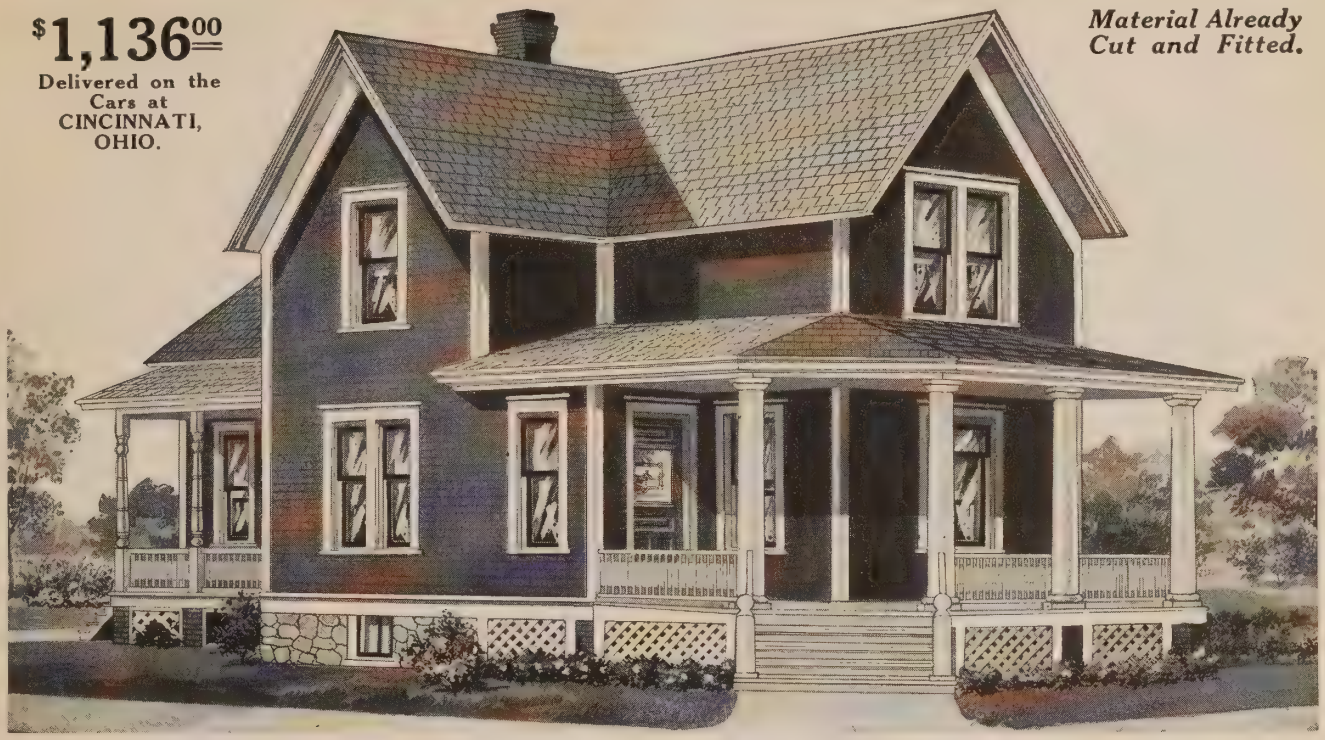

THE SUBURBS. SEVEN ROOMS

Complete Plans Furnished Free With Each Order.

For $1,136.00 we will furnish all the material to build this Seven-Room Double Built House, consisting of

LUMBER, LATH,
SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,

FINISHING LUMBER,
BUILDING PAPER,
PIPE,
GUTTER,
SASH WEIGHTS,
HARDWARE
AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

First story inside floors, trim, doors, etc., furnished in clear red oak for $76.00 extra.

Price does not include cement, brick or plaster.

This house is 24 feet 6 inches wide by 40 feet long and can be built on a lot 30 feet wide.

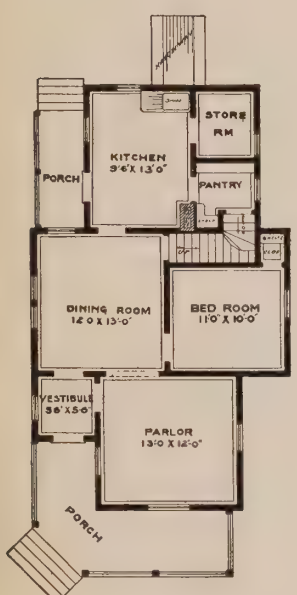

First Floor Plan.

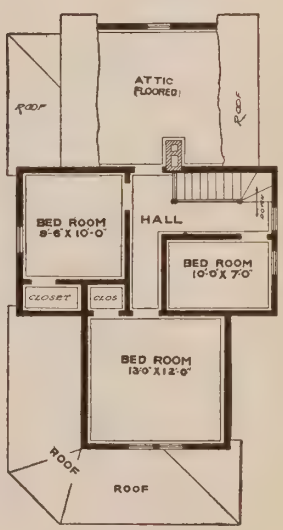

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $109.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $17.00 less.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

Material Already Cut and Fitted.

$1,089.00

Delivered on the Cars at CINCINNATI, OHIO.

THE PARKSIDE. SIX ROOMS

Complete Plans Furnished Free With Each Order.

For $1,089.00 we will furnish all the material to build this Six-Room Two-Story Double Built House, consisting of

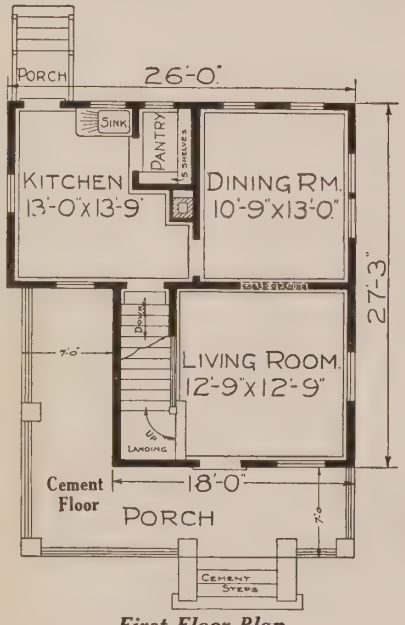

First Floor Plan.

LUMBER, LATH,
SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
CEILING,
SIDING,
FLOORING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE
AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 32 feet wide.

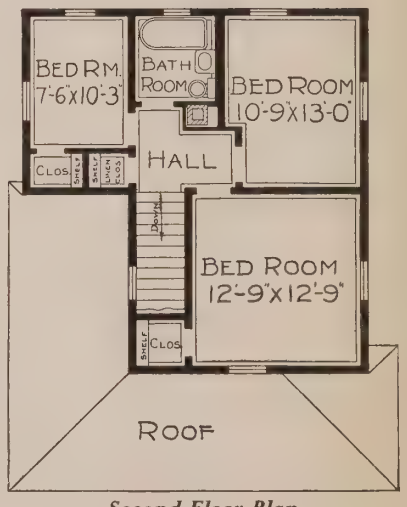

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $103.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles for $11.00 less.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,280.00
Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

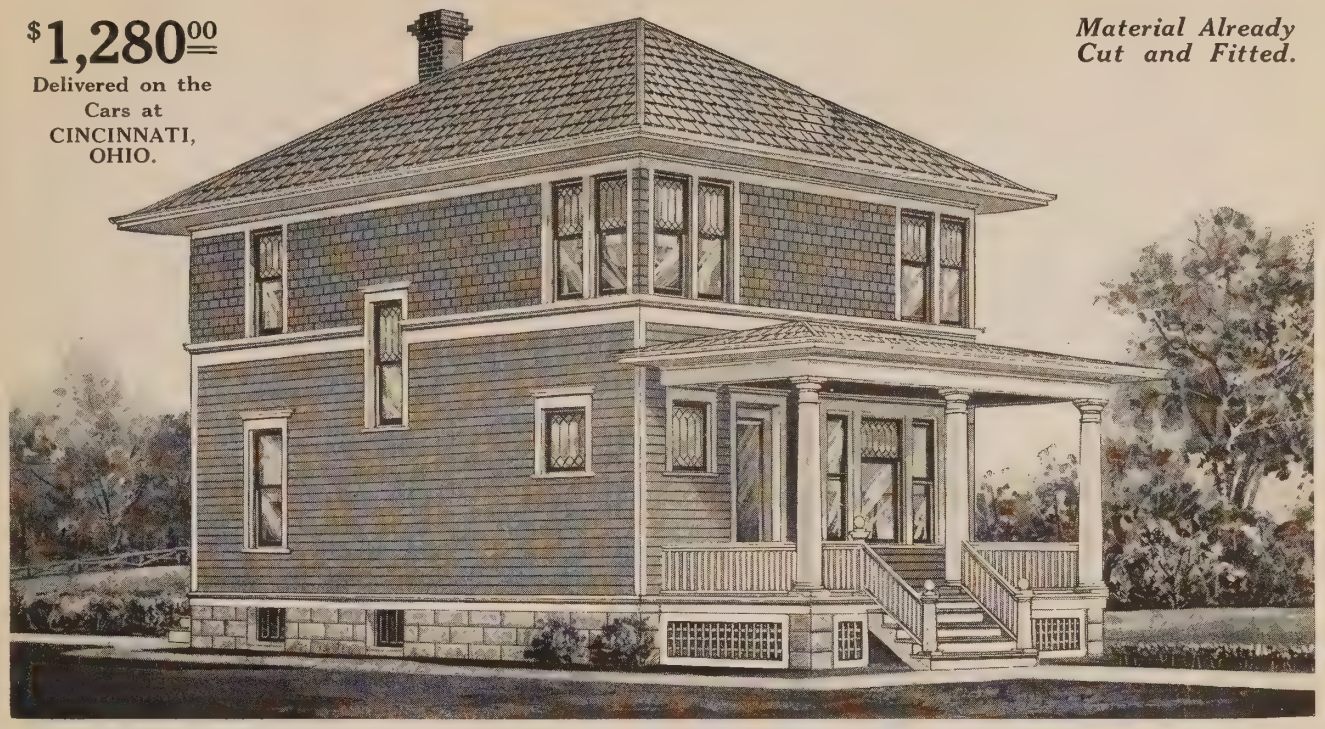

THE BOULEVARD. EIGHT ROOMS

Complete Plans Furnished Free With Each Order.

For $1,280.00 we will furnish all the material to build this Eight-Room Double Built House, consisting of

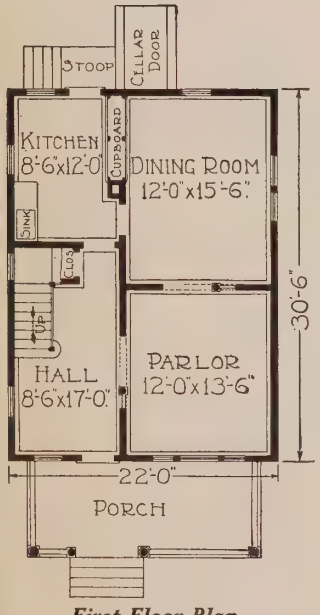

First Floor Plan.

LUMBER,
SHINGLES,
LATH,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,

FINISHING LUMBER,
BUILDING PAPER,
EAVES TROUGH,
SASH WEIGHTS,
HARDWARE AND
PAINTING MATERIAL.

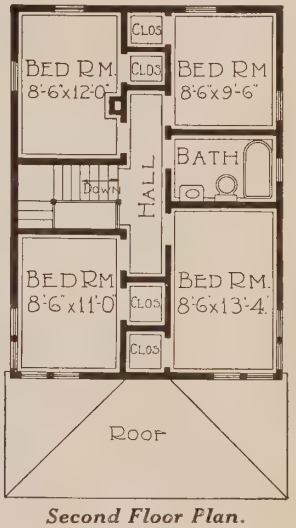

Second Floor Plan.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 28 feet wide.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $125.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $13.00 less.

We will furnish oak doors, oak trim and floors in hall, parlor, dining room and oak stairs for $60.00 extra.

We will furnish maple flooring for kitchen and bathroom for $7.00 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,318.00
Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE INGLESIDE. SEVEN ROOMS

Complete Plans Furnished Free With Each Order.

For $1,318.00 we will furnish all the material to build this Seven-Room Two-Story Double Built Bungalow, consisting of

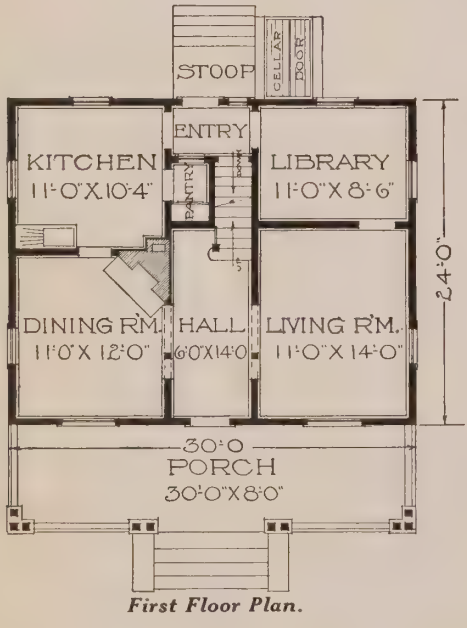

First Floor Plan.

LUMBER,
LATH, SHINGLES,
DOORS, WINDOWS,
MOLDING,
MILL WORK,
CEILING, SIDING,
FLOORING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
MANTEL, HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

Second Floor Plan.

This house can be built on a lot 35 feet wide.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $127.50 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $13.50 less.

We will furnish oak doors, oak trim and oak floors for hall, living room, dining room and oak stairs for $50.60 extra.

We will furnish maple flooring for kitchen, pantry and bathroom for $7.70 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,373.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE BEAUTY. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $1,373.00 we will furnish all the material to build this Five-Room Double Built Bungalow, consisting of

LUMBER, LATH,
SHINGLES,
MILL WORK,
DOORS, WINDOWS,
MOLDING,
SIDEBOARD,
FLOORING,
CEILING,
SIDING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 40 feet wide.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $98.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $13.00 less.

We will furnish oak doors, oak trim and oak floors for parlor and dining room for $50.00 extra.

We will furnish maple flooring for kitchen, pantry and bathroom for $7.65 extra.

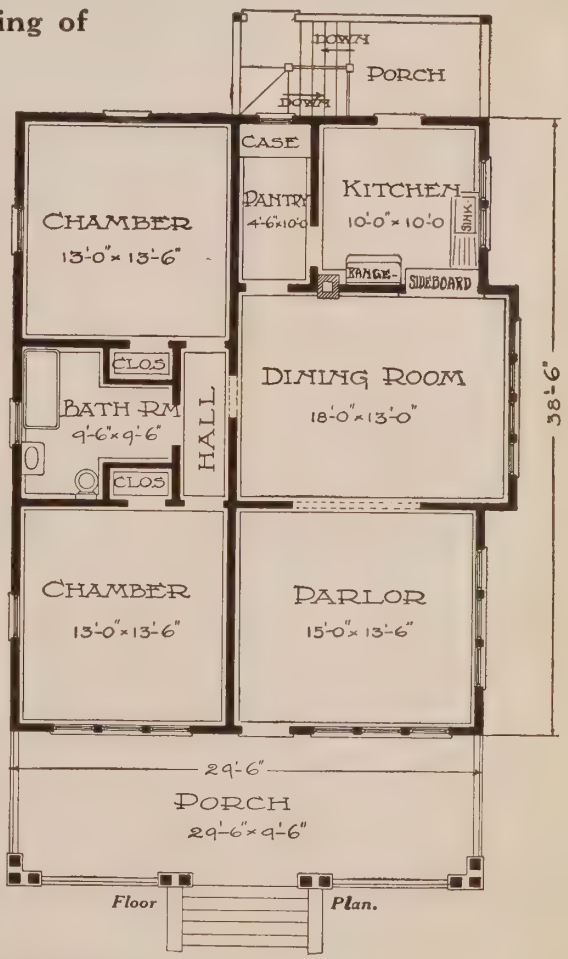

Floor Plan.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,488.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

THE MAJESTIC. EIGHT ROOMS

Complete Plans Furnished Free With Each Order.

For $1,488.00 we will furnish all the material to build this Eight-Room Double Built House, consisting of

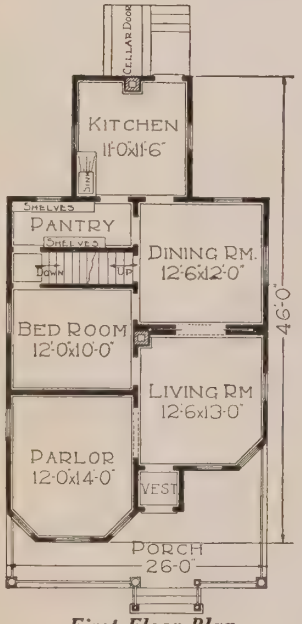

First Floor Plan.

LUMBER,
LATH, SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
CEILING,
SIDING,
FLOORING,
FINISHING LUMBER,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house measures 26x46 feet and can be built on a lot 32 feet wide.

NORWOOD QUALITY

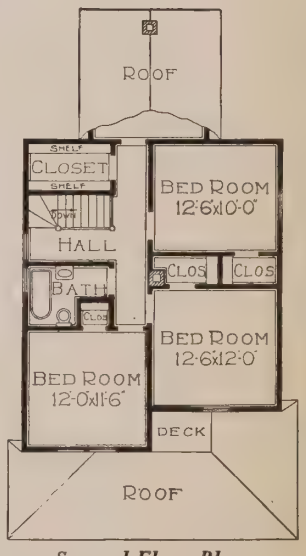

Second Floor Plan.

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $150.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $37.80 less.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

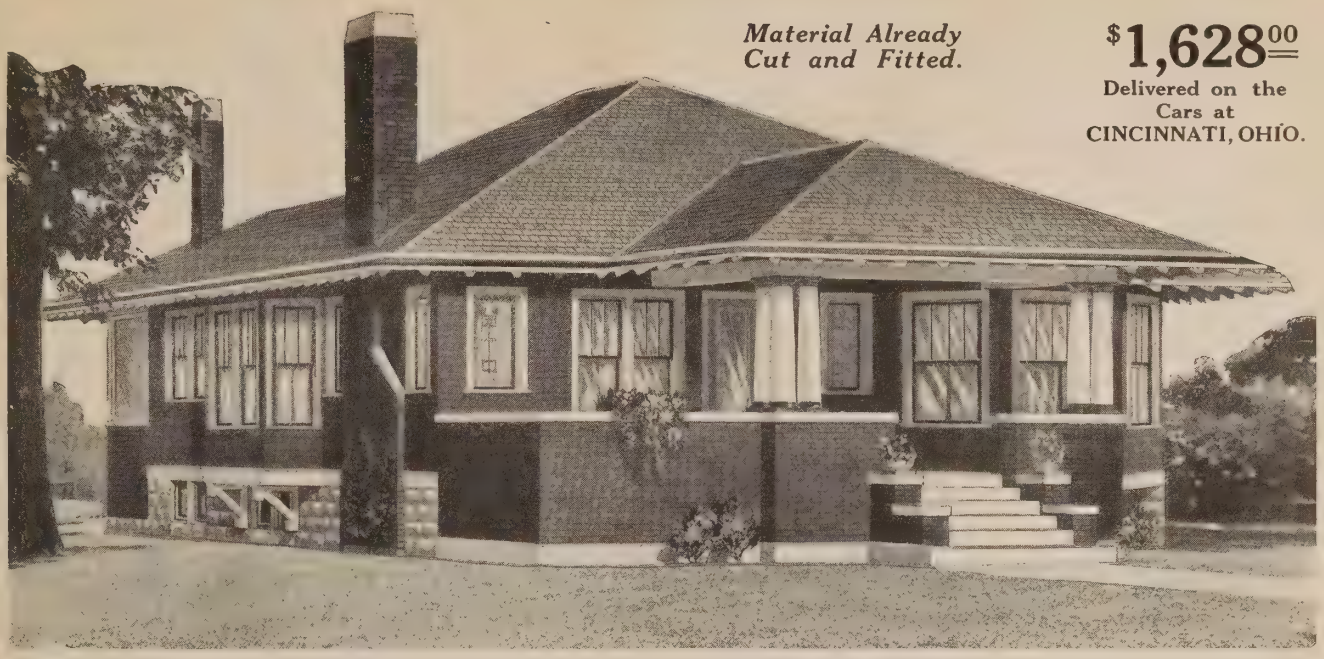

Material Already Cut and Fitted.

$1,628.00
Delivered on the Cars at CINCINNATI, OHIO.

THE HAVEN. SIX ROOMS

Complete Plans Furnished Free With Each Order.

For $1,628.00 we will furnish all the material to build this Six-Room Double Built Bungalow, consisting of

LUMBER,
LATH, SHINGLES,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
CEILING,
SIDING,
FLOORING,
PIPE, GUTTER,

FINISHING LUMBER,
BUILDING PAPER,
SASH WEIGHTS,
MEDICINE CASE,
PANTRY CASE,
BUFFET,
MANTEL,
HARDWARE AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $121.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles for $19.65 less.

We will furnish oak doors, oak trim and oak floors for living room and dining room for $55.00 extra.

We will furnish maple flooring in kitchen, pantry and bathroom for $8.00 extra.

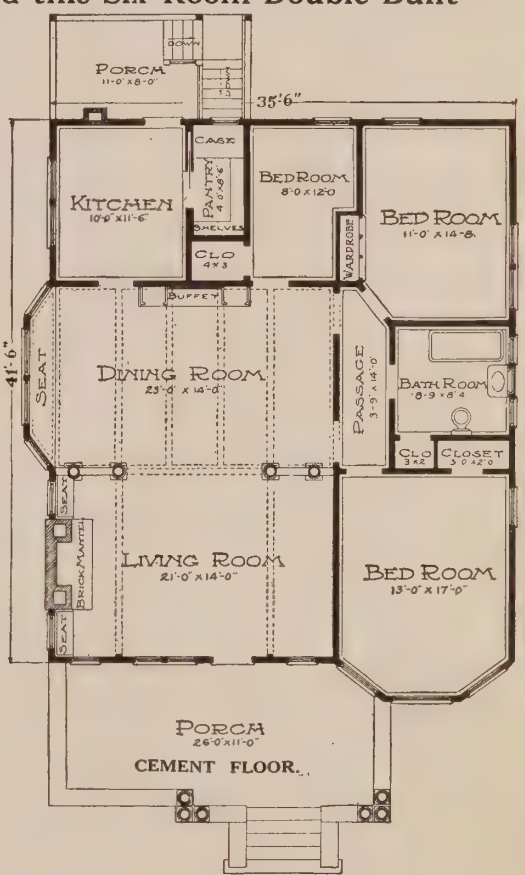

Floor Plan.

This house can be built on a lot 45 feet wide.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,604.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

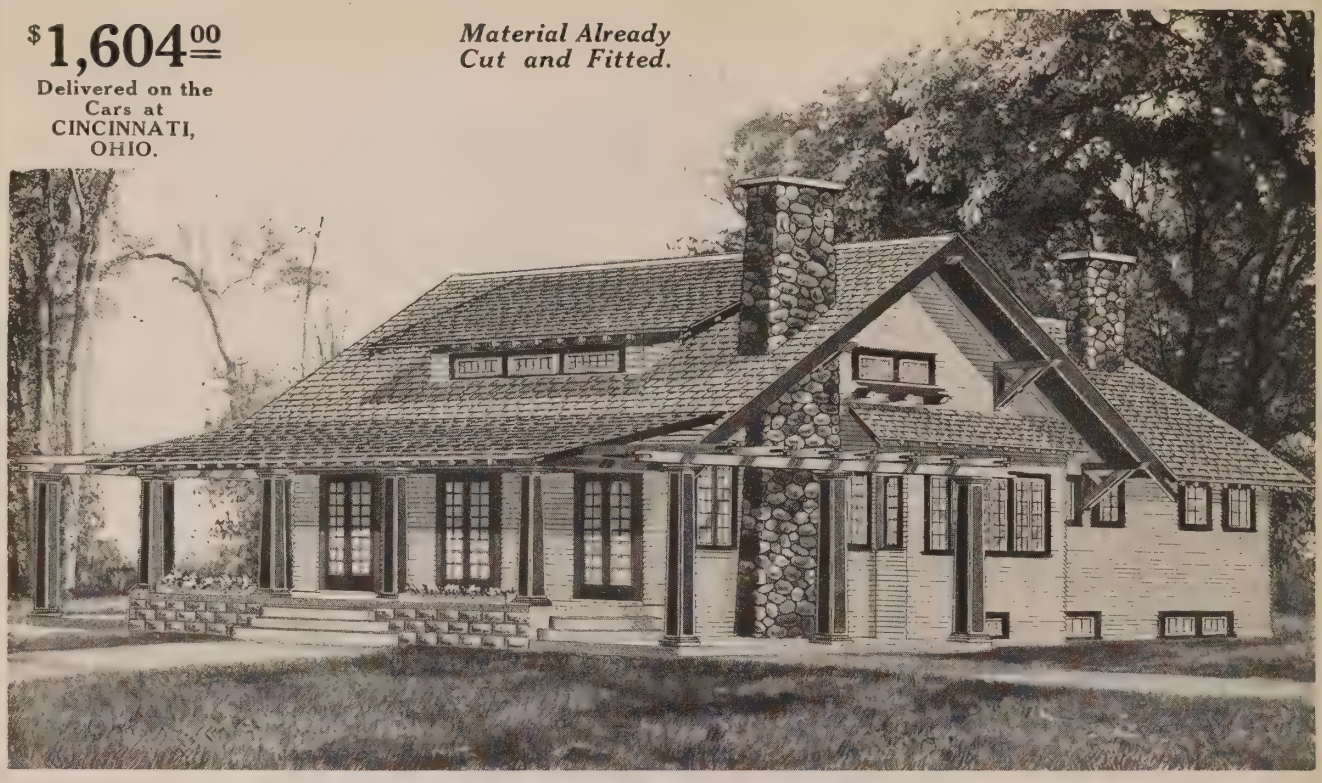

THE SEATTLE. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $1,604.00 we will furnish all the material to build this Five-Room Double Built Bungalow, consisting of

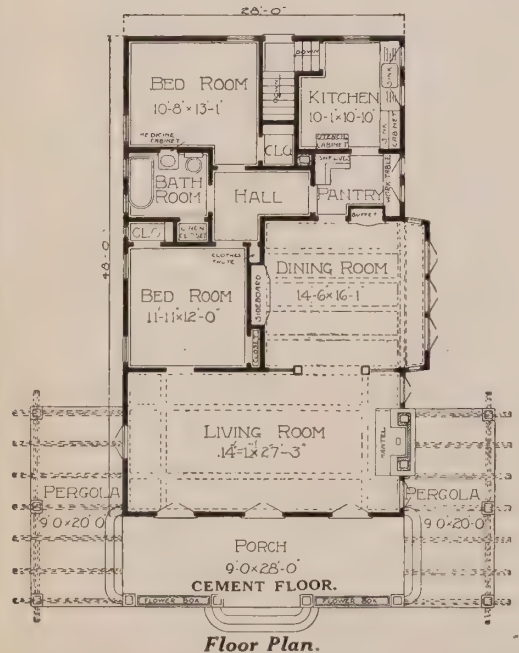

Floor Plan.

This house can be built on a lot 50 feet wide.

LUMBER, LATH,
SHINGLES,
MILL WORK,
DOORS, WINDOWS,
MOLDING,
FLOORING,
CEILING,
SIDING,
FINISHING
LUMBER,
BUFFET,
CHINA CLOSET,
MEDICINE CASE,
BUILDING PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE
AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material to build this bungalow according to our plans.

Price does not include cement, brick or plaster.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $87.00 extra.
We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $18.00 less.
We will furnish oak doors, oak trim and oak floors for living room and dining room for $67.00 extra.
We will furnish maple flooring for kitchen, pantry and bathroom for $8.25 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

$1,816.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

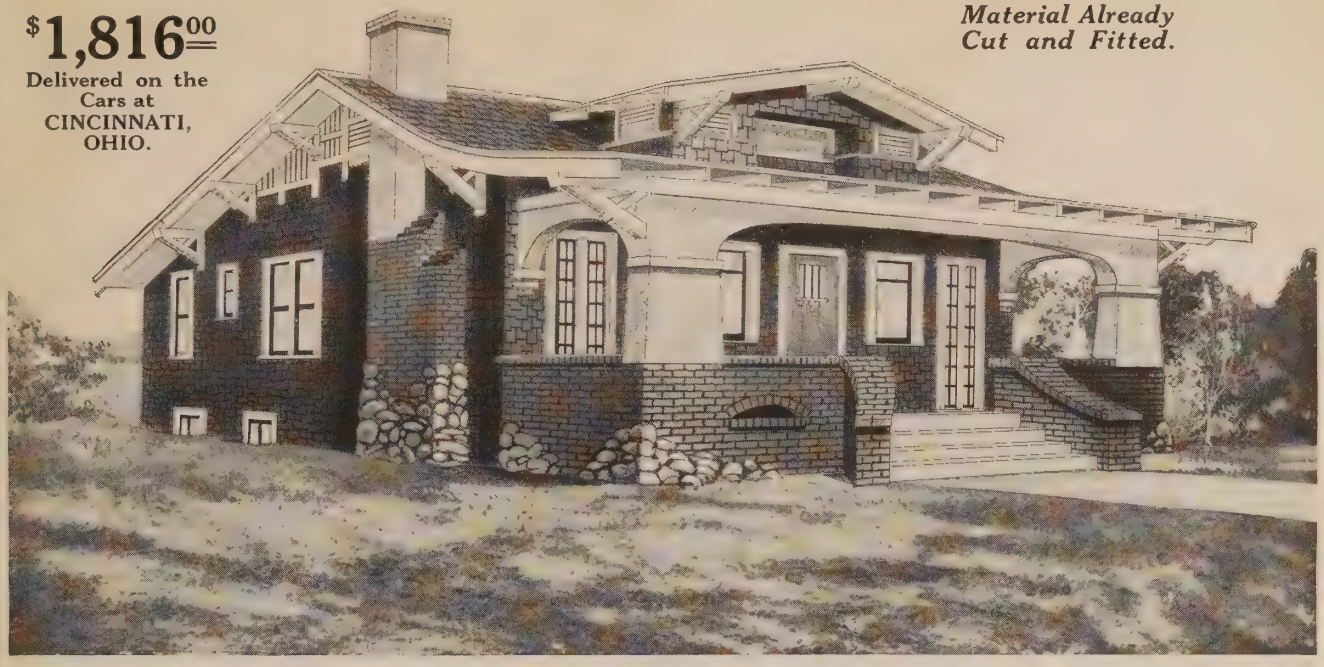

THE LOS ANGELES. FIVE ROOMS

Complete Plans Furnished Free With Each Order.

For $1,816.00 we will furnish all the material to build this Five-Room Double Built Bungalow, consisting of

LUMBER,
LATH, SHINGLES,
MILL WORK,
DOORS, WINDOWS,
MOLDINGS,
FLOORING, CEILING,
FINISHING LUMBER,
BUILDING PAPER,
SASH WEIGHTS,
PIPE, GUTTER,
BUFFET,
KITCHEN CUPBOARD,
MEDICINE CASE,
HARDWARE AND
PAINTING
MATERIAL.

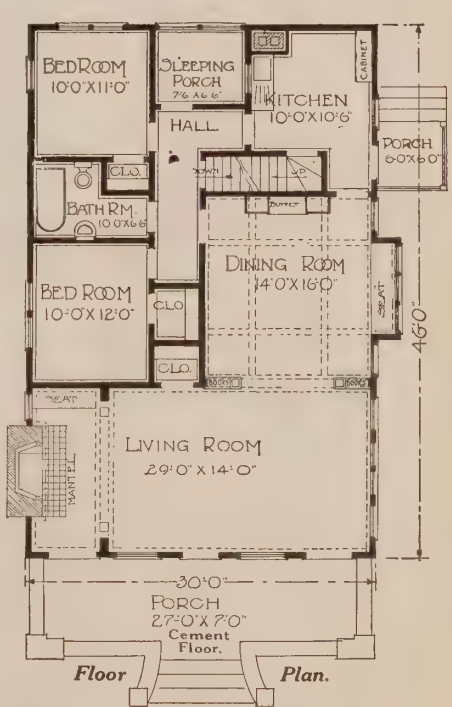

Floor Plan.

NO EXTRAS, as we guarantee enough material to build this bungalow according to our plans.

Inside floors, trim, doors, etc., furnished in clear red oak for $139.00 extra.

Price does not include cement, brick or plaster.

This house can be built on a lot 40 feet wide.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $91.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $25.00 less.

We will furnish oak doors, oak trim and oak floors for living room and dining room for $75.00 extra.

We will furnish maple flooring for kitchen and bathroom for $5.60 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio

(Norwood Station)

$2,230.00

Delivered on the Cars at CINCINNATI, OHIO.

Material Already Cut and Fitted.

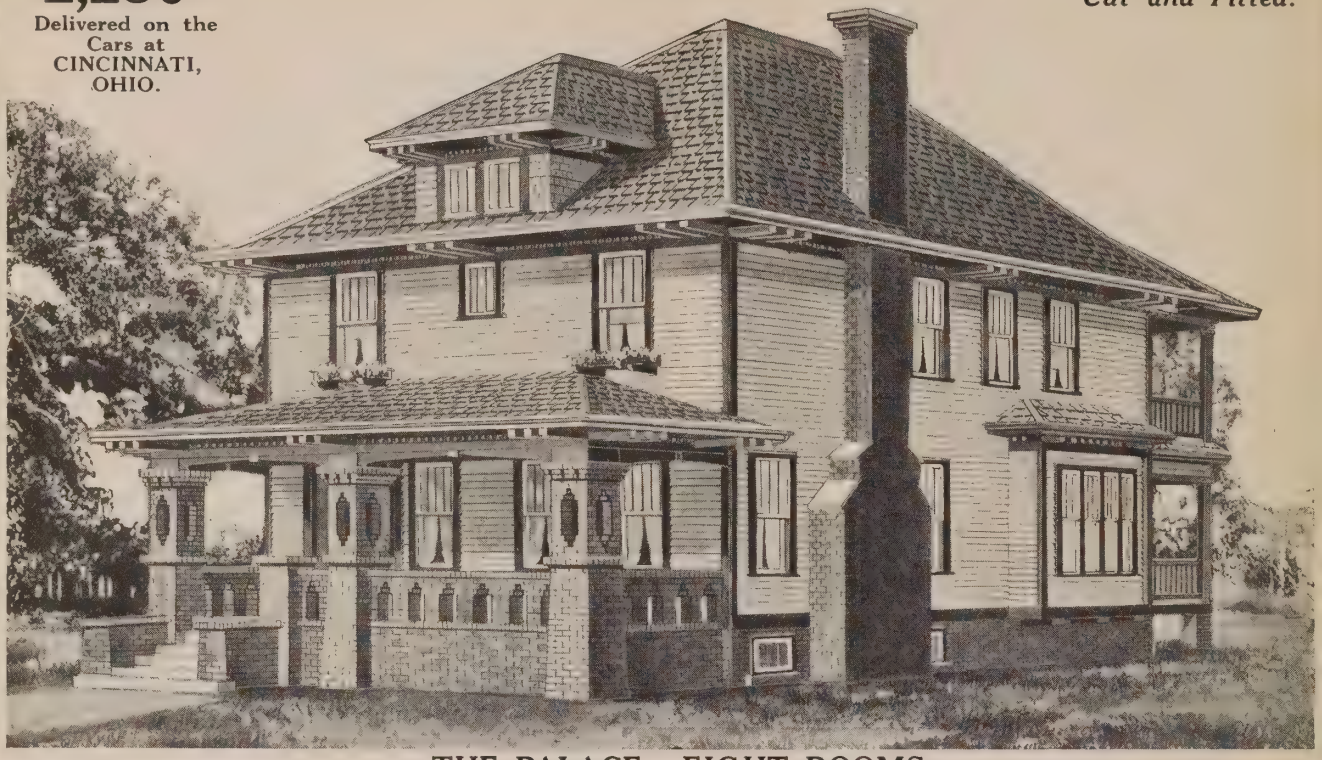

THE PALACE. EIGHT ROOMS

Complete Plans Furnished Free With Each Order.

For $2,230.00 we will furnish all the material to build this Eight-Room Double Built House, consisting of

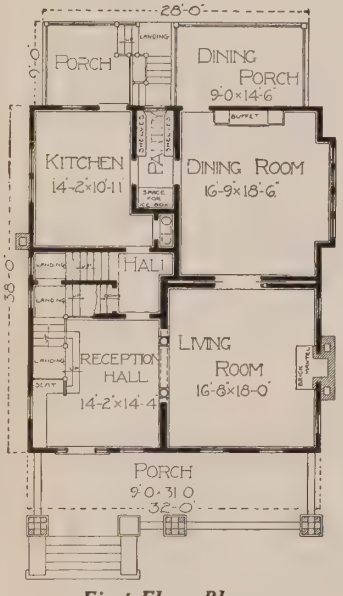

First Floor Plan.

LUMBER, LATH, SHINGLES, MILL WORK, DOORS, WINDOWS, MOLDING, FLOORING, SIDING, CEILING, FINISHING LUMBER, BUILDING PAPER, PIPE, GUTTER, SASH WEIGHTS, HARDWARE, BRICK MANTEL, BUFFET, MEDICINE CASE AND PAINTING MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

First story inside trim, doors, etc., furnished in clear red oak for $84.00 extra.

Price does not include cement, brick or plaster.

This house can be built on a lot 38 feet wide.

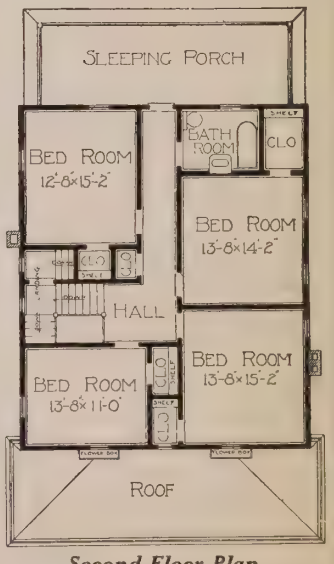

Second Floor Plan.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $198.00 extra.

We will furnish Norwood Shingle Roll Roofing red or sea green in color, instead of wood shingles, for $25.00 less.

We will furnish oak doors, oak trim and oak floors for reception hall, living room and dining room and oak stairs for $80.00 extra.

We will furnish maple flooring for kitchen, pantry and bathroom for $8.50 extra.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio

(Norwood Station)

$1,886.00

Delivered on the Cars at CINCINNATI, OHIO

Material Already Cut and Fitted.

THE UNION. TEN ROOMS

Complete Plans Furnished Free With Each Order.

For $1,886.00 we will furnish all the material to build this Ten-Room Two-Family Double Built Building, consisting of

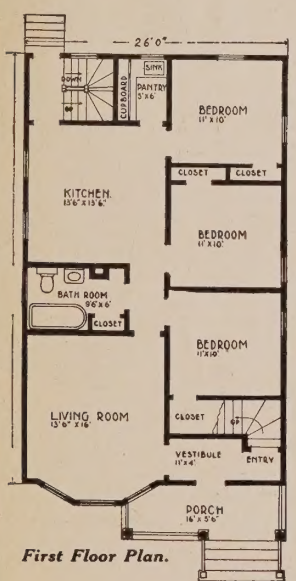

First Floor Plan.

LUMBER,
SHINGLES,
LATH,
MILL WORK,
DOORS,
WINDOWS,
MOLDING,
CEILING,
SIDING,
FLOORING,

FINISHING
LUMBER,
BUILDING
PAPER,
PIPE, GUTTER,
SASH WEIGHTS,
HARDWARE
AND
PAINTING
MATERIAL.

NO EXTRAS, as we guarantee enough material at the above price to build this house according to our plans.

Price does not include cement, brick or plaster.

This house can be built on a lot 32 feet wide.

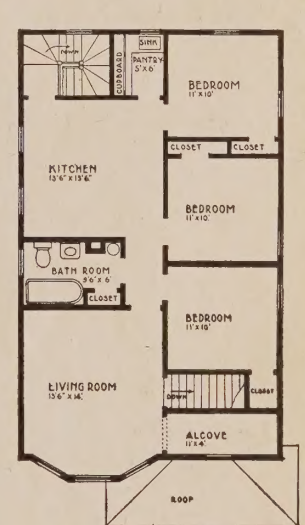

Second Floor Plan.

NORWOOD QUALITY

We will furnish sheet plaster and plaster finish to take the place of wood lath and plaster for $235.00 extra.

We will furnish Norwood Shingle Roll Roofing, red or sea green in color, instead of wood shingles, for $15.40 less.

FOR DESCRIPTION OF MATERIAL AND TERMS SEE PAGES 44 AND 45.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

QUALITY—TERMS—PACKING

Quality

The quality of our building material is unexcelled. If you do not find it entirely satisfactory, you can send it back at our expense and we will return the purchase price with any freight charges you may have paid. This makes you the judge of the values we offer.

All our lumber and mill work is guaranteed to be strictly up to or better than the official grades adopted by the Sash, Door and Blind Manufacturers' Association of the Northwest. The sizes listed in this catalog are standard sizes. They are the same sizes handled by all of the leading manufacturers in the country.

Terms

1—Cash in full with the order.

2—Special C. O. D. Terms. We will accept orders amounting to $50.00 or over for C. O. D. shipments when accompanied by the part payments shown below:

Send $15.00 with orders of $50.00 to $75.00.
Send $25.00 with orders of over $75.00 to $100.00.
Send $30.00 with orders of over $100.00 to $150.00.
Send $35.00 with orders of over $150.00 to $200.00.
Send 25 per cent with orders of over $200.00; that is to say, one-fourth of the total amount of the order.

3—No cash with order. If you want to examine the materials before paying any money you can deposit the full purchase price in your local bank, and then send us the certificate of deposit stating that the money will be paid to The Norwood Sash and Door Manufacturing Co. after you have examined the material and find it to be satisfactory. Upon receipt of the certificate of deposit we will ship the material to you, and if you believe it to be good value for the price you can instruct your bank to forward the money to us, otherwise you do not have to pay for it.

4—Pay for the material as the building goes up. If you are building by an arrangement with a bank or building and loan association, we will ship the material to you upon receipt of an assurance from the bank or the building and loan association that payments for the material will be made at certain periods as the work progresses.

Care in Packing

No concern takes better care in packing and crating material than we do. A tough grade of paper is used to cover our doors, balusters, newels, etc. All exposed parts are carefully protected by sound ½-inch lumber which will stand the rough handling in transit. All our mill work products are clean and bright, and easier to work than much of the material offered elsewhere.

BANK REFERENCES: First National Bank of Cincinnati, Ohio, and First National Bank of Norwood, Ohio.

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

AVERY LIBRARY
COLUMBIA UNIVERSITY

Description of Material in "Double Built" Ready Cut Houses

Framing Material, such as joists, studdings and rafters, furnished in selected quality No. 1 Yellow Pine.

Roof Boards and Sheathing supplied in high quality No. 1 Yellow Pine.

Shingles or Roofing furnished as indicated on the page where each house is described.

Bridging furnished for each tier of joists.

Frames. Outside door and window frames furnished with outside casing 1⅛ inches thick.

Flooring is built up of two layers, the first layer plain boards of good quality Yellow Pine, which is covered with extra heavy building paper, and then the finished floor applied over the building paper. The finished floor is 13/16x3¼ inches Clear Yellow Pine of choice grain.

Siding is supplied in Clear Cypress or Cedar Shingles, as illustrated, unless where stonekote is specified.

Porch Floors furnished in Clear Yellow Pine unless otherwise stated on the page where each house is described.

Building Paper supplied to line the entire outside walls between sheathing and siding.

Inside Doors and Inside Trim supplied in Clear Yellow Pine.

Hardware, such as locks, hinges and other hardware, supplied in high class design and quality.

Painting Material. Paints, oils and varnishes supplied for two coats, outside and inside, with the exception of the inside flooring.

This Is the Way Your Material Comes When You Buy One of Our "Already Cut" Houses

1—Girders **cut and fitted** for built-up construction. (Much stronger than solid pieces. Ask any architectural authority.)
2—Wall Plates **cut and fitted,** ready to put in place. High grade quality. (No defects to hide with stain or creosote.)
3—All trimmers, joists and studding **cut and fitted,** ready to be nailed together.
4—Rafters **cut and fitted,** ready for nailing. Spaced 14⅜ inches apart. (Joists or rafters more than 14⅜ inches apart make weak and unsafe construction.)
5—Roof Boards **cut and fitted,** ready for nailing.
6—Sheathing **cut and fitted,** ready for nailing.
7—Sub-flooring for first and second floors **cut and fitted,** ready for nailing.
8—Water table **cut and fitted,** ready for nailing.
9—All porch material—the timbers, joists, flooring, columns, posts, molding, roof boards, ceiling and porch rail **cut and fitted,** ready for nailing.
10—All window and door frames and jambs **cut, fitted and mitered,** ready for nailing.
11—The finished flooring **cut and fitted,** ready for nailing.
12—All stair material—the treads, risers, rails, balusters, string board, etc., **cut and fitted,** ready for nailing.
13—Doors mortised to receive locks.
14—All inside casings and stops for windows and doors **cut and fitted,** ready for nailing.
15—Window stool **cut and fitted,** ready for nailing.
16—Window apron and cap trim **cut and fitted,** ready for nailing.

Each and every piece of the above material for your house is **measured, fitted and cut to exact size** for you at our factory. The only work necessary on the job is to nail the pieces in place, following the instructions and plans furnished free with the material. Each piece is plainly marked to show just where it goes in the house. You can easily see that when all this work is done at our factory, building a house is a small job. The siding is all cut 1 inch longer than the actual required size, to insure close joints against casings and corners. Picture molding, base and base molding furnished in random lengths, to be fitted on the job. In addition, you get:

Lath for the entire house **all full lengths.**
Shingles or roofing as specified.
Complete hardware—locks, knobs, hinges, nails, etc.
Building paper, pipe, gutter, sash weights.
Paint, varnish and filler for two coats (your selection of color).

Warning! Be very careful where you purchase a "Ready Cut" House. You may have to cut and fit most of the material yourself. When you purchase from us you know exactly what you get and how we cut and fit the material.

NORWOOD QUALITY

The Norwood Sash and Door Mfg. Co., Cincinnati, Ohio
(Norwood Station)

AVERY LIBRARY
COLUMBIA UNIVERSITY

NORWOOD
QUALITY